

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number
WO 02/083754 A1

(51) International Patent Classification⁷: **C08F 210/16**,
210/06, 2/06, 4/643

(21) International Application Number: PCT/US02/10515

(22) International Filing Date: 2 April 2002 (02.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/834,256 12 April 2001 (12.04.2001) US
60/336,655 5 December 2001 (05.12.2001) US
60/342,186 19 December 2001 (19.12.2001) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:

US	09/834,256 (CIP)
Filed on	12 April 2001 (12.04.2001)
US	60/336,655 (CIP)
Filed on	5 December 2001 (05.12.2001)
US	60/342,186 (CIP)
Filed on	19 December 2001 (19.12.2001)

(71) Applicant (for all designated States except US): **EXXON-MOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DATTA, Sudhin** [US/US]; 2203 Driscoll Street, Houston, TX 77019-6826 (US). **HU, Weiguo** [CN/US]; 16100 Space Center Blvd. #823, Houston, TX 77062 (US). **RAVISHANKAR, P. S.** [US/US]; 6006 Soaring Pine Ct., Kingwood, TX 77345

(US). **HARRINGTON, Bruce, A.** [US/US]; 14239 Oak Chase Drive, Houston, TX 77062 (US). **RODRIGUEZ, George** [US/US]; 13827 Placid Brook Ct., Houston, TX 77059 (US).

(74) Agents: **SCHMIDT, Paige, C.** et al.; ExxonMobil Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROPYLENE ETHYLENE POLYMERS AND PRODUCTION PROCESS

(57) Abstract: Ethylene propylene copolymers, substantially free of diene, are described. The copolymers will have a uniform distribution of both tacticity and comonomer between copolymer chains. Further, the copolymers will exhibit a statistically insignificant intramolecular difference of tacticity. The copolymers are made in the presence of a metallocene catalyst.



WO 02/083754 A1

**TITLE: PROPYLENE ETHYLENE POLYMERS AND
 PRODUCTION PROCESS**

5 **FIELD**

Embodiments of the present invention include copolymers of ethylene and propylene, in the substantial absence of dienes. More specifically, the copolymers are made in a process that employs a single reactor, in steady state.

10 **BACKGROUND**

Ethylene propylene copolymers made with metallocene catalysts are known. Many such copolymers are intermolecularly heterogeneous in terms of tacticity, composition (weight percent comonomers) or both. Further, such polymers may also, or in the alternative, be compositionally heterogeneous within
15 a polymer chain. Such characteristics may be, but are not always, the result of multiple reactor schemes or sequential addition of polymer.

The elasticity, flexural modulus and tensile strength of such copolymers, when considered in the aggregate, may not reach a satisfactory level for use in commercial elastomeric operation.

20 U.S. Patent No. 5,747,621 suggests fractionable reactor blend polypropylenes, directly obtainable from the polymerization reaction of propylene having 30 to 90 % by weight of a boiling n-heptane fraction, soluble in xylene at 135°C. In Table 2 of this document, the only fractionation disclosed, each of the solvents appears to be at its boiling point. Further, reference to this table shows
25 that the diethyl-ether fraction has no melting point (amorphous).

In the journal articles *Science*, Vol. 267, pp 217-219 (1995); *Macromolecules*, Vol. 31, pp 6908-6916 (1998); and *Macromolecules*, Vol. 32, pp 8283-8290, pp 3334-3340 and pp 8100-8106, propylene polymers with similar characteristics as those disclosed in the above discussed U.S. Patent No. 5,747,621
30 are made and fractionated. The polymers are made with bis(aryl indenyl) or bisindenyl metallocene catalysts. In these journal articles, these polymers are fractionated in boiling ether and heptane, leaving a portion of the polymer

insoluble in either. The polypropylenes are stated to be compositionally heterogeneous in terms of tacticity and molecular weight.

U.S. Patent No. 5,504,172 suggests a propylene elastomer that has properties such that:

- 5 (a) the elastomer contains propylene units in an amount of 50 to 95% by mol and ethylene units in an amount of 5 to 50 % by mol;
- (b) a triad tacticity of three propylene units-chains consisting of head-to-tail bonds, as measured by ^{13}C NMR, is not less than 90.0%; and
- 10 (c) a proportion of inversely inserted propylene units based on the 2,1-insertion of a propylene monomer in all propylene insertions, as measured by ^{13}C NMR, is not less than 0.5%, and a proportion of inversely inserted propylene units based on the 1,3-insertion of a propylene monomer, as measured by ^{13}C NMR, is not more than 0.05%.

15 U.S. Patent No. 5,391,629 suggests block and tapered copolymers of ethylene with an α -olefin. The copolymers are made by a process of sequentially contacting ethylene with an α -olefin monomer in the presence of an activated cyclopentadienyl catalyst system.

20 EP 0 374 695 suggests ethylene-propylene copolymers and a process for preparing them. The copolymers have a reactivity ratio product, r_1r_2 , between 0.5 and 1.5 and an isotactic index greater than 0 percent. The copolymers are produced in the presence of a homogeneous chiral catalyst and an alumoxane co-catalyst.

25 There is a commercial need therefore for an ethylene propylene copolymer that will show a melting point and an excellent balance of elasticity, flexural modulus and tensile strength. It would further be desirable if such polymers could be produced at higher polymerization temperatures.

30 It is known that temperature affects the polymerization involving the stereo regular polymerization of alpha-olefins, in particular propylene. Under similar polymerization conditions the increase in the polymerization temperatures leads to both a drop in molecular weight as well as a loss in the tacticity of the alpha olefin residues along the chain. This effect exists for both the homopolymerization of the 1-olefins as well as copolymerization of 1-olefins with

ethylene, or other alpha-olefins. These changes in the characteristic of the polymer are detrimental to certain end uses of the polyolefin. However, there are commercial incentives in raising the polymerization temperature since this improves the throughput of the polymerization reactor. This would necessarily lead to better economics for production for these polymers if physical attributes of the polymer product, such as tacticity and molecular weight, could meet or exceed the properties now achieved at lower temperatures.

SUMMARY

We have discovered that ethylene-propylene copolymers, when produced in the presence of a metallocene catalyst and an activator, in a single steady state reactor, show a surprising and unexpected balance of flexural modulus, tensile strength and elasticity. Moreover, these and other properties of the copolymers show surprising differences relative to conventional polymer blends, such as blends of isotactic polypropylene and ethylene-propylene copolymers.

In one embodiment, the copolymer includes from a lower limit of 5% or 6% or 8% or 10% by weight to an upper limit of 20% or 25% by weight ethylene-derived units, and from a lower limit of 75% or 80% by weight to an upper limit of 95% or 94% or 92% or 90% by weight propylene-derived units, the percentages by weight based on the total weight of propylene- and ethylene-derived units. The copolymer is substantially free of diene-derived units.

In various embodiments, features of the copolymers include some or all of the following characteristics, where ranges from any recited upper limit to any recited lower limit are contemplated:

(i) a melting point ranging from an upper limit of less than 110 °C, or less than 90 °C, or less than 80 °C, or less than 70 °C, to a lower limit of greater than 25 °C, or greater than 35 °C, or greater than 40 °C, or greater than 45 °C;

(ii) a relationship of elasticity to 500% tensile modulus such that

Elasticity $\leq 0.935M + 12$, or

Elasticity $\leq 0.935M + 6$, or

Elasticity $\leq 0.935M$,

where elasticity is in percent and M is the 500% tensile modulus in megapascal (MPa);

(iii) a relationship of flexural modulus to 500% tensile modulus such that

5 $\text{Flexural Modulus} \leq 4.2e^{0.27M} + 50$, or
 $\text{Flexural Modulus} \leq 4.2e^{0.27M} + 30$, or
 $\text{Flexural Modulus} \leq 4.2e^{0.27M} + 10$, or
 $\text{Flexural Modulus} \leq 4.2e^{0.27M} + 2$,

where flexural modulus is in MPa and M is the 500% tensile modulus in MPa;

10 (iv) a heat of fusion ranging from a lower limit of greater than 1.0 joule per gram (J/g), or greater than 1.5 J/g, or greater than 4.0 J/g, or greater than 6.0 J/g, or greater than 7.0 J/g, to an upper limit of less than 125 J/g, or less than 100 J/g, or less than 75 J/g, or less than 60 J/g, or less than 50 J/g, or less than 40 J/g, or less than 30 J/g;

15 (v) a triad tacticity as determined by carbon-13 nuclear magnetic resonance (^{13}C NMR) of greater than 75 %, or greater than 80 %, or greater than 85 %, or greater than 90 %;

 (vi) a tacticity index m/r ranging from a lower limit of 4 or 6 to an upper limit of 8 or 10 or 12;

20 (vii) a proportion of inversely inserted propylene units based on 2,1 insertion of propylene monomer in all propylene insertions, as measured by ^{13}C NMR, of greater than 0.5 % or greater than 0.6 %;

 (viii) a proportion of inversely inserted propylene units based on 1,3 insertion of propylene monomer in all propylene insertions, as measured by
25 ^{13}C NMR, of greater than 0.05 %, or greater than 0.06 %, or greater than 0.07 %, or greater than 0.08 %, or greater than 0.085%;

 (ix) an intermolecular tacticity such that at least X % by weight of the copolymer is soluble in two adjacent temperature fractions of a thermal fractionation carried out in hexane in 8 °C increments, where X is 75, or 80, or 85,
30 or 90, or 95, or 97, or 99;

 (x) a reactivity ratio product r_1r_2 of less than 1.5, or less than 1.3, or less than 1.0, or less than 0.8;

(xi) a molecular weight distribution Mw/Mn ranging from a lower limit of 1.5 or 1.8 to an upper limit of 40 or 20 or 10 or 5 or 3;

(xii) a molecular weight of from 15,000 – 5,000,000;

(xiii) a solid state proton nuclear magnetic resonance (¹H NMR) relaxation time of less than 18 milliseconds (ms), or less than 16 ms, or less than 14 ms, or less than 12 ms, or less than 10 ms;

(xiv) an elasticity as defined herein of less than 30 %, or less than 20 %, or less than 10 %, or less than 8 %, or less than 5 %; and

(xv) a 500 % tensile modulus of greater than 0.5 MPa, or greater than 0.8 MPa, or greater than 1.0 MPa, or greater than 2.0 MPa.

The copolymer be made in the presence of a bridged metallocene catalyst, in a single steady-state reactor. Thus, in another aspect, the present invention is directed to a process for producing an ethylene-propylene copolymer having some or all of the above-recited characteristics, by reacting ethylene and propylene in a steady-state reactor under reactive conditions and in the presence of a bridged metallocene catalyst.

In another embodiment, the invention comprises a solution polymerization process for making the above described semicrystalline ethylene propylene copolymers by using particular catalyst and activator combination that lead to similar molecular weights and crystallinity from polymerization at a higher temperature or alternatively higher molecular weight and/or crystallinity when compared to polymerization processes conducted at a lower temperature using previous catalyst and activator combinations. This embodiment involves the use of bulky, non-coordinating activators in conjunction with single sited metallocene catalysts capable of making the polymers described above. In another aspect, this embodiment can additionally operate using a higher concentration of the monomers present in the polymerization reactor during polymerization. The combination of these two components of the invention leads to copolymers which have both a higher molecular weight as well as a higher level of tacticity of the propylene residues. Thus these bulky activator systems and higher monomer concentrations can be used for the polymerization of these copolymers at higher temperatures compared to the polymerization conducted with smaller anions while

still generating copolymers which have similar molecular weights and isotactic propylene crystallinity.

DESCRIPTION OF THE DRAWINGS

5 These and other features, aspects and advantages of embodiments of our invention will become better understood with reference to the following description, appended claims and accompanying drawings, in which:

10 Figure 1 is a plot of the natural log of crystalline intensity (by ^1H NMR) versus time in milliseconds; $T_{1\rho}$ referred to in this description is the slope of the line.

 Figure 2 is a plot of flexural modulus, in MPa, versus 500% tensile modulus, in MPa.

 Figure 3 is a plot of elasticity, in percent, versus 500% tensile modulus, in MPa.

15 Figure 4 is a plot of melting point (T_m) in $^{\circ}\text{C}$, as determined by DSC, versus percent ethylene of copolymers of the invention (triangle symbols) and blends of isotactic polypropylene with copolymers of the invention (diamond symbols).

20 Figure 5 is a plot of heat of fusion in J/g as a function of ethylene content and polymerization temperature for samples prepared using the process of the invention and comparative samples.

 Figure 6 is a plot of the Mooney (ML127C) as a function of propylene content in hexane solvent in weight percent and polymerization temperature for the copolymers of the current invention and comparative samples.

DESCRIPTION

25 We contemplate thermoplastic polymer compositions composed of a majority of propylene with a minor amount of ethylene. These polymer compositions include a linear, single homogeneous macromolecular copolymer structure. These polymers have limited crystallinity due to adjacent isotactic propylene units and have a melting point as described below. They are generally devoid of any substantial intermolecular heterogeneity in tacticity and comonomer

30

composition, and are substantially free of diene. They are also devoid of any substantial heterogeneity in intramolecular composition distribution. In addition, these thermoplastic polymer compositions are unexpectedly soft and elastic.

5 COPOLYMER

Monomers in the Copolymer

According to an embodiment of the present invention, the copolymer includes from a lower limit of 5% or 6% or 8% or 10% by weight ethylene-derived units to an upper limit of 20% or 25% by weight ethylene-derived units. These embodiments also will include propylene-derived units present in the copolymer in the range of from a lower limit of 75% or 80% by weight to an upper limit of 95% or 94% or 92% or 90% by weight. These percentages by weight are based on the total weight of the propylene and ethylene-derived units; *i.e.*, based on the sum of weight percent propylene-derived units and weight percent ethylene-derived units being 100%. Within these ranges, these copolymers are mildly crystalline as measured by differential scanning calorimetry (DSC), and are exceptionally soft, while still retaining substantial tensile strength and elasticity. Elasticity, as defined in detail hereinbelow, is a dimensional recovery from elongation for these copolymers. At ethylene compositions lower than the above limits for the copolymer, such polymers are generally crystalline, similar to crystalline isotactic polypropylene, and while having excellent tensile strength, they do not have the favorable softness and elasticity. At ethylene compositions higher than the above limits for the copolymer component, the copolymer is substantially amorphous. While such a material of higher ethylene composition may be soft, these compositions are weak in tensile strength and poor in elasticity. In summary, such copolymers of embodiments of our invention exhibit the softness, tensile strength and elasticity characteristic of vulcanized rubbers, without vulcanization.

In embodiments of the present invention, we intend that the copolymers be substantially free of diene-derived units. Dienes are nonconjugated diolefins which may be incorporated in polymers to facilitate chemical crosslinking reactions. "Substantially free of diene" is defined to be less than 1 % diene, or less

than 0.5 % diene, or less than 0.1 % diene, or less than 0.05 % diene, or equal to 0 %. All of these percentages are by weight in the copolymer. The presence or absence of diene can be conventionally determined by infrared techniques well known to those skilled in the art.

5 Sources of diene include diene monomer added to the polymerization of ethylene and propylene, or use of diene in catalysts. No matter the source of such dienes, the above outlined limits on their inclusion in the copolymer are contemplated. Conjugated diene-containing metallocene catalysts have been suggested for the formation of copolymers of olefins. However, polymers made
10 from such catalysts will incorporate the diene from the catalyst, consistent with the incorporation of other monomers in the polymerization.

Molecular Weight and Polydispersity Index

15 Molecular weight distribution (MWD) is a measure of the range of molecular weights within a given polymer sample. It is well known that the breadth of the MWD can be characterized by the ratios of various molecular weight averages, such as the ratio of the weight average molecular weight to the number average molecular weight, M_w/M_n , or the ratio of the Z-average molecular weight to the weight average molecular weight, M_z/M_w .

20 M_z , M_w and M_n can be measured using gel permeation chromatography (GPC), also known as size exclusion chromatography (SEC). This technique utilizes an instrument containing columns packed with porous beads, an elution solvent, and detector in order to separate polymer molecules of different sizes. In a typical measurement, the GPC instrument used is a Waters chromatograph
25 equipped with ultrastyro gel columns operated at 145 °C. The elution solvent used is trichlorobenzene. The columns are calibrated using sixteen polystyrene standards of precisely known molecular weights. A correlation of polystyrene retention volume obtained from the standards, to the retention volume of the polymer tested yields the polymer molecular weight.

30

Average molecular weights M can be computed from the expression:

$$M = \frac{\sum_i N_i M_i^{n+1}}{\sum_i N_i M_i^n}$$

where N_i is the number of molecules having a molecular weight M_i . When $n = 0$, M is the number average molecular weight M_n . When $n = 1$, M is the weight average molecular weight M_w . When $n = 2$, M is the Z-average molecular weight M_z . The desired MWD function (e.g., M_w/M_n or M_z/M_w) is the ratio of the corresponding M values. Measurement of M and MWD is well known in the art and is discussed in more detail in, for example, Slade, P. E. Ed., *Polymer Molecular Weights Part II*, Marcel Dekker, Inc., NY, (1975) 287-368; Rodriguez, F., *Principles of Polymer Systems 3rd ed.*, Hemisphere Pub. Corp., NY, (1989) 155-160; U.S. Patent No. 4,540,753; Verstrate et al., *Macromolecules*, vol. 21, (1988) 3360; and references cited therein.

In embodiments of our invention, a copolymer is included having a weight average molecular weight (M_w) of from 15,000 - 5,000,000, or from 20,000 to 1,000,000 and a molecular weight distribution M_w/M_n (sometimes referred to as a "polydispersity index" (PDI)) ranging from a lower limit of 1.5 or 1.8 to an upper limit of 40 or 20 or 10 or 5 or 3.

In the measurement of properties ascribed to polymers of embodiments of our invention, there is a substantial absence of a secondary or tertiary polymer or polymers to form a blend. By "substantial absence" we intend less than 10%, or less than 5%, or less than 2.5%, or less than 1%, or 0%, by weight.

In another embodiment, the copolymers of the invention have a weight average molecular weight that can be calculated by application of the following formula:

$$M_w > 6.10 \cdot P \cdot e^{(3370/T)}$$

Wherein:

M_w = the weight average molecular weight

T = the polymerization reaction temperature in degrees Kelvin

P = the steady state propylene concentration in the polymerization reaction zone in moles per liter

Melting Point and Crystallinity

The copolymer, according to an embodiment of our invention, has a single melting point. The copolymer can be a random copolymer of ethylene and propylene having a melting point (T_m) by Differential Scanning Calorimetry (DSC) ranging from an upper limit of less than 110 °C, less than 90 °C, less than 80 °C, or less than 70 °C; to a lower limit of greater than 25 °C, or greater than 35 °C, or greater than 40°C or greater than 45°C. Figure 4 shows the melting point of propylene-ethylene copolymers of the invention as a function of ethylene weight percent, *i.e.*, weight percent of ethylene-derived units (triangle symbols). For comparison, the diamond symbols in Figure 4 show the melting point of blends of isotactic polypropylene and the inventive copolymers also as a function of weight percent ethylene. Figure 4 clearly shows that copolymers of the present invention have a lower melting point than propylene-ethylene copolymer/isotactic polypropylene blends having the same weight percent ethylene.

Embodiments of our invention include copolymers having a heat of fusion, as determined by DSC, ranging from a lower limit of greater than 1.0 J/g, or greater than 1.5 J/g, or greater than 4.0 J/g, or greater than 6.0 J/g, or greater than 7.0 J/g, to an upper limit of less than 125 J/g, or less than 100 J/g, or less than 75 J/g, or less than 60 J/g, or less than 50 J/g, or less than 40 J/g, or less than 30 J/g. Without wishing to be bound by theory, we believe that the copolymers of embodiments of our invention have generally isotactic crystallizable propylene sequences, and the above heats of fusion are believed to be due to the melting of these crystalline segments.

In another embodiment, the copolymers of the invention have a heat of fusion that can be calculated by application of the following formula:

$$H_f > 311 * (E - 18.5)^2 / T$$

Wherein:

H_f = the heat of fusion, measured as described below

E = the ethylene content (meaning units derived from ethylene) of the copolymer, measured as described below; and

T = the polymerization reaction temperature in degrees Kelvin.

Tacticity Index

The tacticity index, expressed herein as "m/r", is determined by ^{13}C nuclear magnetic resonance (NMR). The tacticity index m/r is calculated as defined in H.N. Cheng, *Macromolecules*, 17, 1950 (1984). The designation "m" or "r" describes the stereochemistry of pairs of contiguous propylene groups, "m" referring to meso and "r" to racemic. An m/r ratio of 1.0 generally describes a syndiotactic polymer, and an m/r ratio of 2.0 an atactic material. An isotactic material theoretically may have a ratio approaching infinity, and many by-product atactic polymers have sufficient isotactic content to result in ratios of greater than 50. Copolymers of embodiments of our invention can have a tacticity index m/r ranging from a lower limit of 4 or 6 to an upper limit of 8 or 10 or 12.

Triad tacticity




An ancillary procedure for the description of the tacticity of the propylene units of embodiments of the current invention is the use of triad tacticity. The triad tacticity of a polymer is the relative tacticity of a sequence of three adjacent propylene units, a chain consisting of head to tail bonds, expressed as a binary combination of m and r sequences. It is usually expressed for copolymers of the present invention as the ratio of the number of units of the specified tacticity to all of the propylene triads in the copolymer.

The triad tacticity (mm fraction) of a propylene copolymer can be determined from a ^{13}C NMR spectrum of the propylene copolymer and the following formula:

$$\text{mm Fraction} = \frac{\text{PPP}(\text{mm})}{\text{PPP}(\text{mm}) + \text{PPP}(\text{mr}) + \text{PPP}(\text{rr})}$$

where PPP(mm), PPP(mr) and PPP(rr) denote peak areas derived from the methyl groups of the second units in the following three propylene unit chains consisting of head-to-tail bonds:

12

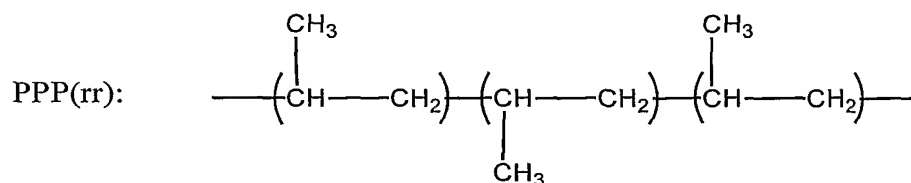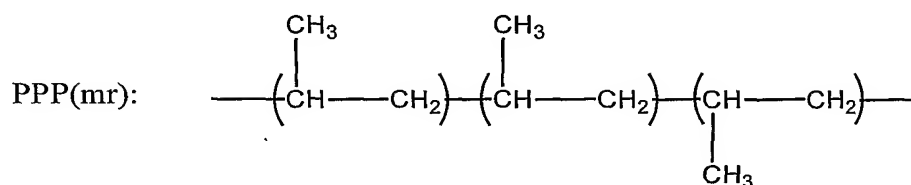

5 The ^{13}C NMR spectrum of the propylene copolymer is measured as described in U.S. Patent No. 5,504,172. The spectrum relating to the methyl carbon region (19-23 parts per million (ppm)) can be divided into a first region (21.2-21.9 ppm), a second region (20.3-21.0 ppm) and a third region (19.5-20.3 ppm). Each peak in the spectrum was assigned with reference to an article in the
10 journal *Polymer*, Volume 30 (1989), page 1350.

In the first region, the methyl group of the second unit in the three propylene unit chain represented by PPP (mm) resonates.

In the second region, the methyl group of the second unit in the three propylene unit chain represented by PPP (mr) resonates, and the methyl group
15 (PPE-methyl group) of a propylene unit whose adjacent units are a propylene unit and an ethylene unit resonates (in the vicinity of 20.7 ppm).

In the third region, the methyl group of the second unit in the three propylene unit chain represented by PPP (rr) resonates, and the methyl group
20 (EPE-methyl group) of a propylene unit whose adjacent units are ethylene units resonates (in the vicinity of 19.8 ppm).

Calculation of the Triad Tacticity and Errors in Propylene Insertion

The calculation of the triad tacticity is outlined in the techniques shown in U.S. Patent No. 5,504,172. Subtraction of the peak areas for the error in propylene


insertions (both 2,1 and 1,3) from peak areas from the total peak areas of the second region and the third region, the peak areas based on the 3 propylene units-chains (PPP(mr) and PPP(rr)) consisting of head-to-tail bonds can be obtained. Thus, the peak areas of PPP(mm), PPP(mr) and PPP(rr) can be evaluated, and hence the triad tacticity of the propylene unit chain consisting of head-to-tail bonds can be determined.

The propylene copolymers of embodiments of our invention have a triad tacticity of three propylene units, as measured by ^{13}C NMR, of greater than 75 %, or greater than 80 %, or greater than 82 %, or greater than 85 %, or greater than 90 %.


Stereo- and regio- errors in insertion of propylene: 2,1 and 1,3 insertions

The insertion of propylene can occur to a small extent by either 2,1 (tail to tail) or 1,3 insertions (end to end). Examples of 2,1 insertion are shown in structures 1 and 2 below.

Structure (1):

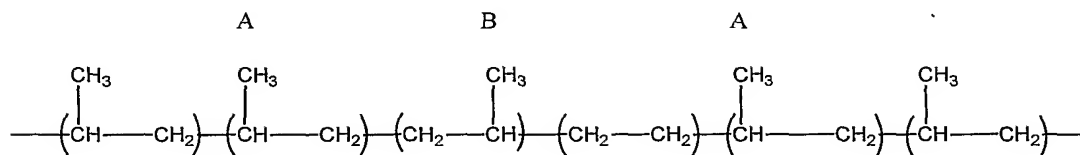

Structure (2):

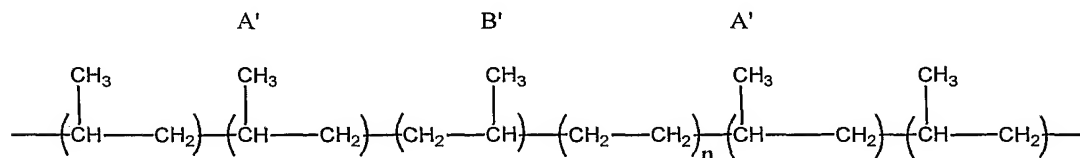

where $n \geq 2$.

A peak of the carbon A and a peak of the carbon A' appear in the second region. A peak of the carbon B and a peak of the carbon B' appear in the third region, as described above. Among the peaks which appear in the first to third regions, peaks which are not based on the 3 propylene unit chain consisting of head-to-tail bonds are peaks based on the PPE-methyl group, the EPE-methyl group, the carbon A, the carbon A', the carbon B, and the carbon B'.

The peak area based on the PPE-methyl group can be evaluated by the peak area of the PPE-methine group (resonance in the vicinity of 30.8 ppm), and the peak area based on the EPE-methyl group can be evaluated by the peak area of the EPE-methine group (resonance in the vicinity of 33.1 ppm). The peak area based on the carbon A can be evaluated by twice as much as the peak area of the methine carbon (resonance in the vicinity of 33.9 ppm) to which the methyl group of the carbon B is directly bonded; and the peak area based on the carbon A' can be evaluated by the peak area of the adjacent methine carbon (resonance in the vicinity of 33.6 ppm) of the methyl group of the carbon B'. The peak area based on the carbon B can be evaluated by the peak area of the adjacent methine carbon (resonance in the vicinity of 33.9 ppm); and the peak area based on the carbon B' can be also evaluated by the adjacent methine carbon (resonance in the vicinity of 33.6 ppm).

By subtracting these peak areas from the total peak areas of the second region and the third region, the peak areas based on the three propylene unit chains (PPP(mr) and PPP(rr)) consisting of head-to-tail bonds can be obtained. Thus, the peak areas of PPP(mm), PPP(mr) and PPP(rr) can be evaluated, and the triad tacticity of the propylene unit chain consisting of head-to-tail bonds can be determined.

The proportion of the 2,1-insertions to all of the propylene insertions in a propylene elastomer was calculated by the following formula with reference to article in the journal *Polymer*, vol. 30 (1989), p.1350.

Proportion of inversely inserted unit based on 2,1-insertion (%) =

$$\frac{0.25I_{\alpha\beta}(\text{structure}(i)) + 0.5I_{\alpha\beta}(\text{structure}(ii))}{I_{\alpha\alpha} + I_{\alpha\beta}(\text{structure}(ii)) + 0.5(I_{\alpha\gamma} + I_{\alpha\beta}(\text{structure}(i)) + I_{\alpha\delta})} \times 100$$

Naming of the peaks in the above formula was made in accordance with a method by Carman, et al. in the journal *Rubber Chemistry and Technology*, volume 44 (1971), page 781, where $I_{\alpha\delta}$ denotes a peak area of the $\alpha\delta^+$ secondary carbon peak. It is difficult to separate the peak area of $I_{\alpha\beta}$ (structure (i)) from $I_{\alpha\beta}$ (structure (ii)) because of overlapping of the peaks. Carbon peaks having the corresponding areas can be substituted therefor.

The measurement of the 1,3 insertion requires the measurement of the $\beta\gamma$ peak. Two structures can contribute to the $\beta\gamma$ peak: (1) a 1,3 insertion of a propylene monomer; and (2) from a 2,1-insertion of a propylene monomer followed by two ethylene monomers. This peak is described as the 1.3 insertion peak and we use the procedure described in U.S. Patent No. 5,504,172, which describes this $\beta\gamma$ peak and understand it to represent a sequence of four methylene units. The proportion (%) of the amount of these errors was determined by dividing the area of the $\beta\gamma$ peak (resonance in the vicinity of 27.4 ppm) by the sum of all the methyl group peaks and $\frac{1}{2}$ of the area of the $\beta\gamma$ peak, and then multiplying the resulting value by 100. If an α -olefin of three or more carbon atoms is polymerized using an olefin polymerization catalyst, a number of inversely inserted monomer units are present in the molecules of the resultant olefin polymer. In polyolefins prepared by polymerization of α -olefins of three or more carbon atoms in the presence of a chiral metallocene catalyst, 2,1-insertion or 1,3-insertion takes place in addition to the usual 1,2-insertion, such that inversely inserted units such as a 2,1-insertion or a 1,3-insertion are formed in the olefin polymer molecule (see, *Macromolecular Chemistry Rapid Communication*, Volume 8, page 305 (1987), by K. Soga, T. Shiono, S. Takemura and W. Kaminski).

The proportion of inversely inserted propylene units of embodiments of our invention, based on the 2,1-insertion of a propylene monomer in all propylene insertions, as measured by ^{13}C NMR, is greater than 0.5 %, or greater than 0.6 %.

The proportion of inversely inserted propylene units of embodiments of our invention, based on the 1,3-insertion of a propylene monomer, as measured by ^{13}C NMR, is greater than 0.05 %, or greater than 0.06 %, or greater than 0.07 %, or greater than 0.08 %, or greater than 0.085 percent.

MOLECULAR STRUCTURE

Homogeneous distribution

Homogeneous distribution is defined as a statistically insignificant intermolecular difference of both in the composition of the copolymer and in the

tacticity of the polymerized propylene. For a copolymer to have a homogeneous distribution it must meet the requirement of two independent tests: (i) intermolecular distribution of tacticity; and (ii) intermolecular distribution of composition, which are described below. These tests are a measure of the statistically insignificant intermolecular differences of tacticity of the polymerized propylene and the composition of the copolymer, respectively.

Intermolecular Distribution of Tacticity

The copolymer of embodiments of our invention has a statistically insignificant intermolecular difference of tacticity of polymerized propylene between different chains (intermolecularly.). This is determined by thermal fractionation by controlled dissolution generally in a single solvent, at a series of slowly elevated temperatures. A typical solvent is a saturated hydrocarbon such as hexane or heptane. These controlled dissolution procedures are commonly used to separate similar polymers of different crystallinity due to differences in isotactic propylene sequences, as shown in the article in *Macromolecules*, Vol. 26, p2064 (1993). For the copolymers of embodiments of our invention where the tacticity of the propylene units determines the extent of crystallinity, we expected this fractionation procedure will separate the molecules according to tacticity of the incorporated propylene. This procedure is described below.

In embodiments of our invention, at least 75% by weight, or at least 80% by weight, or at least 85% by weight, or at least 90% by weight, or at least 95% by weight, or at least 97% by weight, or at least 99% by weight of the copolymer is soluble in a single temperature fraction, or in two adjacent temperature fractions, with the balance of the copolymer in immediately preceding or succeeding temperature fractions. These percentages are fractions, for instance in hexane, beginning at 23°C and the subsequent fractions are in approximately 8°C increments above 23°C. Meeting such a fractionation requirement means that a polymer has statistically insignificant intermolecular differences of tacticity of the polymerized propylene.

Fractionations have been done where boiling pentane, hexane, heptane and even di-ethyl ether are used for the fractionation. In such boiling solvent

fractionations, polymers of embodiments of our invention will be totally soluble in each of the solvents, offering no analytical information. For this reason, we have chosen to do the fractionation as referred to above and as detailed herein, to find a point within these traditional fractionations to more fully describe our polymer and the surprising and unexpected insignificant intermolecular differences of tacticity of the polymerized propylene.

Intermolecular Distribution of Composition

The copolymer of embodiments of our invention has statistically insignificant intermolecular differences of composition, which is the ratio of propylene to ethylene between different chains (intermolecular). This compositional analysis is by infrared spectroscopy of the fractions of the polymer obtained by the controlled thermal dissolution procedure described above.

A measure of the statistically insignificant intermolecular differences of composition, each of these fractions has a composition (wt. % ethylene content) with a difference of less than 1.5 wt. % (absolute) or less than 1.0 wt. % (absolute), or less than 0.8 wt. % (absolute) of the average wt. % ethylene content of the whole copolymer. Meeting such a fractionation requirement means that a polymer has statistically insignificant intermolecular differences of composition, which is the ratio of propylene to ethylene.

Uniformity

Uniformity is defined to be a statistically insignificant intramolecular difference of both the composition of the copolymer and in the tacticity of the polymerized propylene. For a copolymer to be uniform it must meet the requirement of two independent tests: (i) intramolecular distribution of tacticity; and (ii) intramolecular distribution of composition, which are described below. These tests are a measure of the statistically insignificant intramolecular differences of tacticity of the polymerized propylene and the composition of the copolymer, respectively.

Intramolecular Distribution of Composition

The copolymer of embodiments of our invention has statistically insignificant intramolecular differences of composition, which is the ratio of propylene to ethylene along the segments of the same chain (intramolecular). This compositional analysis is inferred from the process used for the synthesis of these copolymers as well as the results of the sequence distribution analysis of the copolymer, for molecular weights in the range of from 15,000-5,000,000 or 20,000-1,000,000.

Process

The polymerization process is a single stage, steady state, polymerization conducted in a well-mixed continuous feed polymerization reactor. The polymerization can be conducted in solution, although other polymerization procedures such as gas phase or slurry polymerization, which fulfil the requirements of single stage polymerization and continuous feed reactors, are contemplated.

The process can be described as a continuous, non-batch process that, in its steady state operation, is exemplified by removal of amounts of polymer made per unit time, being substantially equal to the amount of polymer withdrawn from the reaction vessel per unit time. By "substantially equal" we intend that these amounts, polymer made per unit time, and polymer withdrawn per unit time, are in ratios of one to other, of from 0.9:1; or 0.95:1; or 0.97:1; or 1:1. In such a reactor, there will be a substantially homogeneous monomer distribution. At the same time, the polymerization is accomplished in substantially single step or stage or in a single reactor, contrasted to multistage or multiple reactors (two or more). These conditions exist for substantially all of the time the copolymer is produced.

Monomer Sequence Distribution

One method to describe the molecular features of an ethylene-propylene copolymer is monomer sequence distribution. Starting with a polymer having a known average composition, the monomer sequence distribution can be determined using spectroscopic analysis. Carbon 13 nuclear magnetic resonance

spectroscopy (^{13}C NMR) can be used for this purpose, and can be used to establish diad and triad distribution via the integration of spectral peaks. (If ^{13}C NMR is not used for this analysis, substantially lower r_1r_2 products are normally obtained.) The reactivity ratio product is described more fully in Textbook of Polymer Chemistry, F.W. Billmeyer, Jr., Interscience Publishers, New York, p.221 *et seq.* (1957).

The reactivity ratio product r_1r_2 , where r_1 is the reactivity of ethylene and r_2 is the reactivity of propylene, can be calculated from the measured diad distribution (PP, EE, EP and PE in this nomenclature) by the application of the following formulae:

$$r_1r_2 = 4 (EE)(PP)/(EP)^2$$

$$r_1 = K_{11}/K_{12} = [2(EE)/EP] X$$

$$r_2 = K_{22}/K_{21} = [2(PP)/(EP)] X$$

$$P = (PP) + (EP/2)$$

$$E = (EE) + (EP/2)$$

where

$$\text{Mol \% E} = [(E)/(E+P)] * 100$$

$$X = E/P \text{ in reactor;}$$

K_{11} and K_{12} are kinetic insertion constants for ethylene; and

K_{21} and K_{22} are kinetic insertion constants for propylene.

As is known to those skilled in the art, a reactivity ratio product r_1r_2 of 0 can define an "alternating" copolymer, and a reactivity ratio product of 1 is said to define a "statistically random" copolymer. In other words, a copolymer having a reactivity ratio product r_1r_2 of between 0.6 and 1.5 is generally said to be random (in strict theoretical terms, generally only a copolymer having a reactivity ratio product r_1r_2 greater than 1.5 contains relatively long homopolymer sequences and is said to be "blocky"). The copolymer of our invention will have a reactivity ratio product r_1r_2 of less than 1.5, or less than 1.3, or less than 1.0, or less than 0.8. The substantially uniform distribution of comonomer within polymer chains of embodiments of our invention generally precludes the possibility of significant amounts of propylene units or sequences within the polymer chain for the molecular weights (weight average) disclosed herein.

Intramolecular distribution of tacticity

The copolymer of embodiments of our invention has statistically insignificant intramolecular differences of tacticity, which is due to isotactic orientation of the propylene units along the segments of the same chain (intramolecular). This compositional analysis is inferred from the detailed analysis of the differential scanning calorimetry, electron microscopy and relaxation measurement ($T_{1\rho}$). In the presence of significant intramolecular differences in tacticity, we would form 'stereoblock' structures, where the number of isotactic propylene residues adjacent to one another is much greater than statistical. Further, the melting point of these polymers depends on the crystallinity, since the more blocky polymers should have a higher melting point as well as depressed solubility in room temperature solvents.

 $T_{1\rho}$: Solid-state ^1H NMR $T_{1\rho}$ relaxation time

The principle of solid state proton NMR relaxation time (^1H NMR $T_{1\rho}$) and its relationship with polymer morphology have been discussed in *Macromolecules* 32 (1999), 1611. The experimental $T_{1\rho}$ relaxation data of embodiments of the current invention, and polypropylene (PP) homopolymer (control sample) are shown in Figure 1, which plots the natural log of the crystalline intensity versus time; the experimental procedure for collecting these data is described below. To fit the data with single exponential function, linear regression was performed on the $\ln(I)$ vs. t data, where I is the intensity of the crystalline signal. Then, the quality of the fit, R^2 , is calculated. The R^2 for a perfect linear correlation is 1.0. The R^2 for polypropylene (control) and a copolymer of the current invention (shown in Figure 1) are 0.9945 and 0.9967, respectively. Therefore, the $T_{1\rho}$ relaxation for both polypropylene homopolymer and a copolymer of the current invention can be well fitted by a single-exponential. From the fit, the $T_{1\rho}$ of polypropylene and a copolymer of the present invention, are calculated as 25 milliseconds (ms) and 8.7 ms, respectively. The large difference in the $T_{1\rho}$ is reflective of their difference in morphology.

The hypothetical polypropylene-like regions would have $T_{1\rho}$ relaxation similar to that in polypropylene homopolymer. As a result, should such regions exist in embodiments of the invention, the $T_{1\rho}$ relaxation would contain a component that has a $T_{1\rho}$ relaxation time characteristic of polypropylene homopolymer (*i.e.*, $T_{1\rho} = 25$ ms). As seen in Figure 1, the $T_{1\rho}$ relaxation of the current invention can only be well fitted by a single exponential. Incorporation of a component whose $T_{1\rho} = 25$ ms would deteriorate the fit. This demonstrates that the polymers of the current invention do not contain long continuous isotactic propylene units. In embodiments of our invention, the $T_{1\rho}$ relaxation time can be less than 18 ms, or less than 16 ms, or less than 14 ms, or less than 12 ms, or less than 10 ms.

$T_{1\rho}$ Measurement.

The experiments are performed on a Bruker DSX-500 Nuclear Magnetic Resonance (NMR) spectrometer, with a ^1H frequency of 500.13 MHz and ^{13}C frequency of 125.75 MHz. The pulse sequence was a 90° (^1H) pulse followed by spin lock and cross polarization ("CP"; time = 0.1 ms). A spin lock field strength of $\gamma B_1 = 2\pi \cdot 60$ kHz is used. After the spin lock, the magnetization is transferred to ^{13}C by CP and then the signal is detected. The crystalline methine signal at 26.7 ppm is recorded and normalized and its natural logarithm (Ln) is plotted against spin lock time in Figure 1. Measurements were made on a polypropylene homopolymer sample, and on a polymer of the present invention, labeled "Sample 4" and described in the Examples below. Table 1 presents the data.

Table 1

Time (ms)	Ln(I) (sample 4)	Ln(I) (PP)
0.02	0	0
0.5	-0.11394	-0.02496
1	-0.18772	-0.04733
2	-0.32424	-0.09871
5	-0.71649	-0.24692
10	-1.27022	-0.44715
20	-2.34181	-0.79526

Catalysts and Activators for Copolymer Production

Catalysts

5 A typical isotactic polymerization process consists of a polymerization in the presence of a catalyst including a bis(cyclopentadienyl) metal compound and either (1) a non-coordinating compatible anion activator, or (2) an alumoxane activator. According to one embodiment of the invention, this process comprises the steps of contacting ethylene and propylene with a catalyst in a suitable
10 polymerization diluent, the catalyst including, in one embodiment, a chiral metallocene compound, *e.g.*, a bis(cyclopentadienyl) metal compound as described in U.S. Patent No. 5,198,401, and an activator. U.S. Patent No. 5,391,629 also describes catalysts useful to produce the copolymers of our invention.

15 The catalyst system described below useful for making the copolymers of embodiments of our invention, is a metallocene with a non-coordinating anion (NCA) activator, and optionally a scavenging compound. Polymerization is conducted in a solution, slurry or gas phase. The polymerization can be performed in a single reactor process. A slurry or solution polymerization process
20 can utilize sub- or superatmospheric pressures and temperatures in the range of from -25 °C to 110 °C. In a slurry polymerization, a suspension of solid,

particulate polymer is formed in a liquid polymerization medium to which ethylene, propylene, hydrogen and catalyst are added. In solution polymerization, the liquid medium serves as a solvent for the polymer. The liquid employed as the polymerization medium can be an alkane or a cycloalkane, such as butane, pentane, hexane, or cyclohexane, or an aromatic hydrocarbon, such as toluene, ethylbenzene or xylene. For slurry polymerization, liquid monomer can also be used. The medium employed should be liquid under the conditions of the polymerization and relatively inert. Hexane or toluene can be employed for solution polymerization. Gas phase polymerization processes are described in U.S. Patent Nos. 4,543,399, 4,588,790, 5,028,670, for example. The catalyst can be supported on any suitable particulate material or porous carrier, such as polymeric supports or inorganic oxides, such as, for example silica, alumina or both. Methods of supporting metallocene catalysts are described in U.S. Patent Nos. 4,808,561, 4,897,455, 4,937,301, 4,937,217, 4,912,075, 5,008,228, 5,086,025, 5,147,949, and 5,238,892.

Propylene and ethylene are the monomers that can be used to make the copolymers of embodiments of our invention, but optionally, ethylene can be replaced or added to in such polymers with a C₄ to C₂₀ α -olefin, such as, for example, 1-butene, 4-methyl-1-pentene, 1-hexene or 1-octene.

20

Metallocene

The terms "metallocene" and "metallocene catalyst precursor" are terms known in the art to mean compounds possessing a Group 4, 5, or 6 transition metal M, with a cyclopentadienyl (Cp) ligand or ligands which may be substituted, at least one non-cyclopentadienyl-derived ligand X, and zero or one heteroatom-containing ligand Y, the ligands being coordinated to M and corresponding in number to the valence thereof. The metallocene catalyst precursors generally require activation with a suitable co-catalyst (sometimes referred to as an activator) in order to yield an active metallocene catalyst, *i.e.*, an organometallic complex with a vacant coordination site that can coordinate, insert, and polymerize olefins.

30

Preferred metallocenes are cyclopentadienyl complexes which have two





Cp ring systems as ligands. The Cp ligands preferably form a bent sandwich complex with the metal, and are preferably locked into a rigid configuration through a bridging group. These cyclopentadienyl complexes have the general formula:



wherein Cp^1 and Cp^2 are preferably the same; R^1 and R^2 are each, independently, a halogen or a hydrocarbyl, halocarbyl, hydrocarbyl-substituted organometalloid or halocarbyl-substituted organometalloid group containing up to 20 carbon atoms; m is preferably 1 to 5; p is preferably 1 to 5; preferably two R^1 and/or R^2 substituents on adjacent carbon atoms of the cyclopentadienyl ring associated therewith can be joined together to form a ring containing from 4 to 20 carbon atoms; R^3 is a bridging group; n is the number of atoms in the direct chain between the two ligands and is preferably 1 to 8, most preferably 1 to 3; M is a transition metal having a valence of from 3 to 6, preferably from group 4, 5, or 6 of the periodic table of the elements, and is preferably in its highest oxidation state; each X is a non-cyclopentadienyl ligand and is, independently, a hydrocarbyl, oxyhydrocarbyl, halocarbyl, hydrocarbyl-substituted organometalloid, oxyhydrocarbyl-substituted organometalloid or halocarbyl-substituted organometalloid group containing up to 20 carbon atoms; and q is equal to the valence of M minus 2.

Numerous examples of the biscyclopentadienyl metallocenes described above for the invention are disclosed in U.S. Patent Nos. 5,324,800; 5,198,401; 5,278,119; 5,387,568; 5,120,867; 5,017,714; 4,871,705; 4,542,199; 4,752,597; 5,132,262; 5,391,629; 5,243,001; 5,278,264; 5,296,434; and 5,304,614.

Illustrative, but not limiting examples of preferred biscyclopentadienyl metallocenes of the type described above are the racemic isomers of:





wherein M is Zr, Hf, or Ti.

Non-coordinating anions

As already mentioned, the metallocene or precursor are activated with a non-coordinating anion. The term "non-coordinating anion" means an anion which either does not coordinate to the transition metal cation or which is only weakly coordinated to the cation, thereby remaining sufficiently labile to be displaced by a neutral Lewis base. "Compatible" non-coordinating anions are those which are not degraded to neutrality when the initially formed complex decomposes. Further, the anion will not transfer an anionic substituent or fragment to the cation so as to cause it to form a neutral four coordinate metallocene compound and a neutral by-product from the anion. Non-coordinating anions useful in accordance with this invention are those which are compatible, stabilize the metallocene cation in the sense of balancing its ionic charge, yet retain sufficient lability to permit displacement by an ethylenically or acetylenically unsaturated monomer during polymerization. Additionally, the anions useful in this invention may be large or bulky in the sense of sufficient molecular size to largely inhibit or prevent neutralization of the metallocene cation by Lewis bases other than the polymerizable monomers that may be present in the polymerization process. Typically the anion will have a molecular size of greater than or equal to 4 angstroms.

Descriptions of ionic catalysts for coordination polymerization including metallocene cations activated by non-coordinating anions appear in the early work in EP-A-0 277 003, EP-A-0 277 004, U.S. Patent Nos. 5,198,401 and 5,278,119, and WO 92/00333. These references suggest a method of preparation wherein metallocenes (bis Cp and mono Cp) are protonated by anionic precursors such that an alkyl/hydride group is abstracted from a transition metal to make it both cationic and charge-balanced by the non-coordinating anion. The use of ionizing ionic compounds not containing an active proton but capable of producing both the active metallocene cation and a non-coordinating anion is also known. See, EP-A-0 426 637, EP-A- 0 573 403 and U.S. Patent No. 5,387,568. Reactive cations other than Bronsted acids capable of ionizing the metallocene compounds

include ferrocenium, triphenylcarbonium, and triethylsilylium cations. Any metal or metalloid capable of forming a coordination complex which is resistant to degradation by water (or other Bronsted or Lewis acids) may be used or contained in the anion of the second activator compound. Suitable metals include, but are not limited to, aluminum, gold, platinum and the like. Suitable metalloids include, but are not limited to, boron, phosphorus, silicon and the like.

An additional method of making the ionic catalysts uses ionizing anionic pre-cursors which are initially neutral Lewis acids but form the cation and anion upon ionizing reaction with the metallocene compounds. For example tris(pentafluorophenyl) boron acts to abstract an alkyl, hydride or silyl ligand to yield a metallocene cation and stabilizing non-coordinating anion; see EP-A-0 427 697 and EP-A-0 520 732. Ionic catalysts for addition polymerization can also be prepared by oxidation of the metal centers of transition metal compounds by anionic precursors containing metallic oxidizing groups along with the anion groups; see EP-A-0 495 375.

Illustrative, but not limiting, examples of suitable activators capable of ionic cationization of the metallocene compounds of the invention, and consequent stabilization with a resulting non-coordinating anion, include:

trialkyl-substituted ammonium salts such as:

triethylammonium tetraphenylborate;
tripropylammonium tetraphenylborate;
tri(n-butyl)ammonium tetraphenylborate;
trimethylammonium tetrakis(p-tolyl)borate;
trimethylammonium tetrakis(o-tolyl)borate;
tributylammonium tetrakis(pentafluorophenyl)borate;
tripropylammonium tetrakis(o,p-dimethylphenyl)borate;
tributylammonium tetrakis(m,m-dimethylphenyl)borate;
tributylammonium tetrakis(p-trifluoromethylphenyl)borate;
tributylammonium tetrakis(pentafluorophenyl)borate;
tri(n-butyl)ammonium tetrakis(o-tolyl)borate and the like;

N,N-dialkyl anilinium salts such as:

N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate;
N,N-dimethylanilinium tetrakis(heptafluoronaphthyl)borate;
N,N-dimethylanilinium tetrakis(perfluoro-4-biphenyl)borate;
N,N-dimethylanilinium tetraphenylborate;
5 N,N-diethylanilinium tetraphenylborate;
N,N-2,4,6-pentamethylanilinium tetraphenylborate and the like;
dialkyl ammonium salts such as:
di-(isopropyl)ammonium tetrakis(pentafluorophenyl)borate;
dicyclohexylammonium tetraphenylborate and the like; and
10 triaryl phosphonium salts such as:
triphenylphosphonium tetraphenylborate;
tri(methylphenyl)phosphonium tetraphenylborate;
tri(dimethylphenyl)phosphonium tetraphenylborate and the like.

Further examples of suitable anionic precursors include those comprising a
15 stable carbonium ion, and a compatible non-coordinating anion. These include:
tropyllium tetrakis(pentafluorophenyl)borate;
triphenylmethylium tetrakis(pentafluorophenyl)borate;
benzene (diazonium) tetrakis(pentafluorophenyl)borate;
tropyllium phenyltris(pentafluorophenyl)borate;
20 triphenylmethylium phenyl-(trispentafluorophenyl)borate;
benzene (diazonium) phenyl-tris(pentafluorophenyl)borate;
tropyllium tetrakis(2,3,5,6-tetrafluorophenyl)borate;
triphenylmethylium tetrakis(2,3,5,6-tetrafluorophenyl)borate;
benzene (diazonium) tetrakis(3,4,5-trifluorophenyl)borate;
25 tropyllium tetrakis(3,4,5-trifluorophenyl)borate;
benzene (diazonium) tetrakis(3,4,5-trifluorophenyl)borate;
tropyllium tetrakis(3,4,5-trifluorophenyl)aluminate;
triphenylmethylium tetrakis(3,4,5-trifluorophenyl)aluminate;
benzene (diazonium) tetrakis(3,4,5-trifluorophenyl)aluminate;
30 tropyllium tetrakis(1,2,2-trifluoroethenyl)borate;
triphenylmethylium tetrakis(1,2,2-trifluoroethenyl)borate;
benzene (diazonium) tetrakis(1,2,2-trifluoroethenyl)borate;


tropyllium tetrakis(2,3,4,5-tetrafluorophenyl)borate;
triphenylmethylium tetrakis(2,3,4,5-tetrafluorophenyl)borate;
benzene (diazonium) tetrakis(2,3,4,5-tetrafluorophenyl)borate, and the
like.


5 A catalyst system of $\mu\text{-(CH}_3\text{)}_2\text{Si(indenyl)}_2\text{Hf(CH}_3\text{)}_2$ with a cocatalyst of N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate, can be used.

In a preferred embodiment, the activating cocatalyst, precursor ionic compounds comprise anionic Group 13 element complexes having four halogenated aromatic ligands typically bulkier than substituted tetraphenyl boron compounds of the exemplified in the identified prior art. These invention aromatic ligands consist of polycyclic aromatic hydrocarbons and aromatic ring assemblies in which two or more rings (or fused ring systems) are joined directly to one another or together. These ligands, which may be the same or different, are covalently bonded directly to the metal/metalloid center. In a preferred
10 embodiment the aryl groups of said halogenated tetraaryl Group 13 element anionic complex comprise at least one fused polycyclic aromatic hydrocarbon or pendant aromatic ring. Indenyl, naphthyl, anthracyl, heptalenyl and biphenyl ligands are exemplary. The number of fused aromatic rings is unimportant so long as the ring junctions and especially the atom chosen as the point of connection to the Group 13 element center permit an essentially tetrahedral structure. Thus, for example, suitable ligands include those illustrated below, the open bond being to the Group 13 atom. See also the polycyclic compound examples in the literature for additional ligand selection, e.g., Nomenclature of Organic Compounds, Chs. 4-5 (ACS, 1974).

25

I

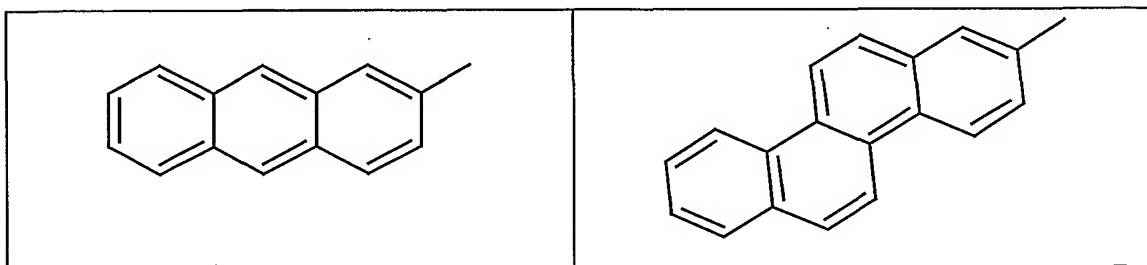


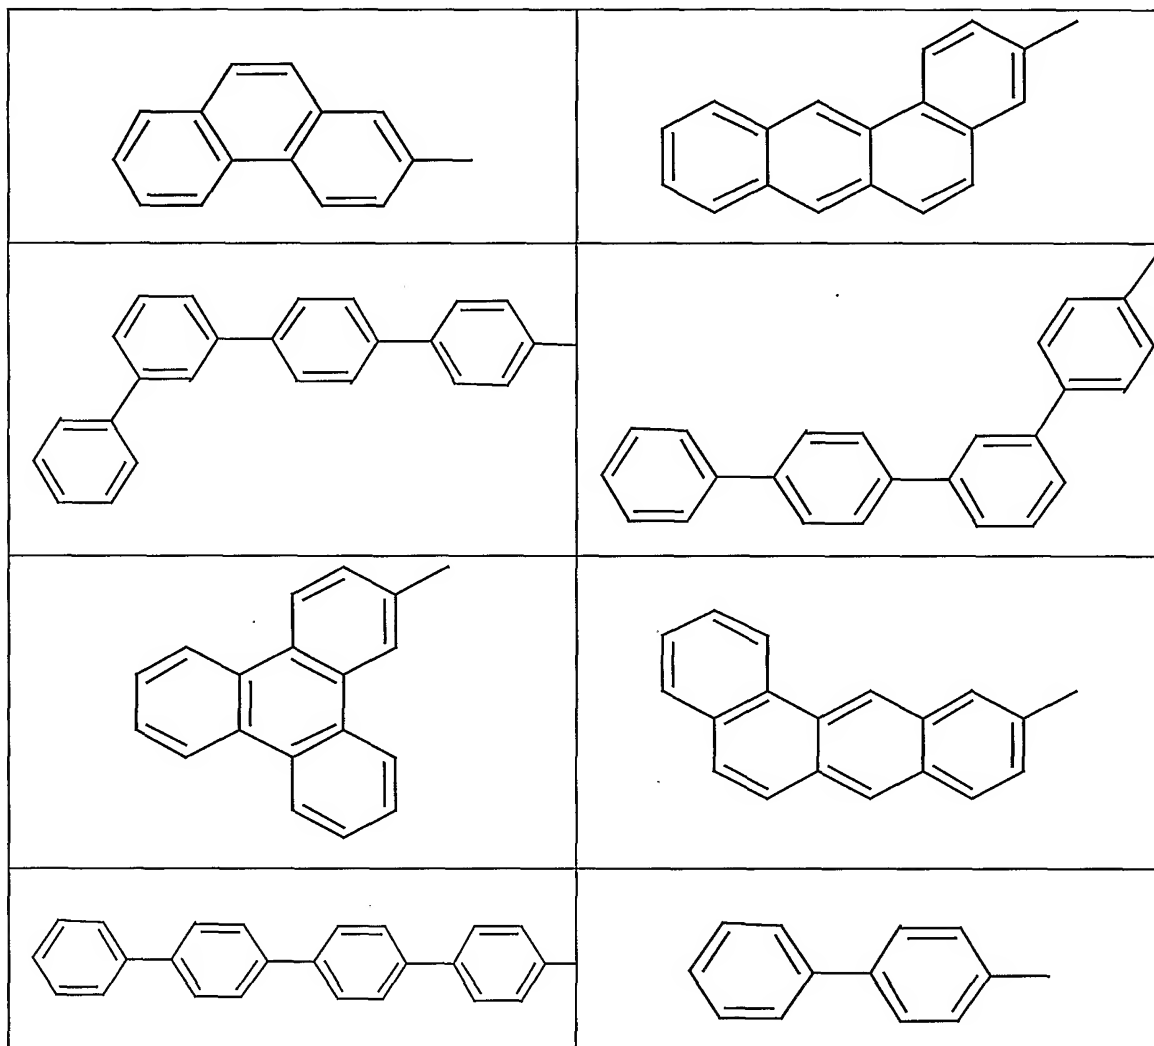


The choice of ligand connection point is particularly important. Substituents or ring junctions *ortho* to the ligand connection point present such steric bulk that adoption of an essentially tetrahedral geometry is largely precluded. Examples of undesirable connection points are depicted below.


5

II

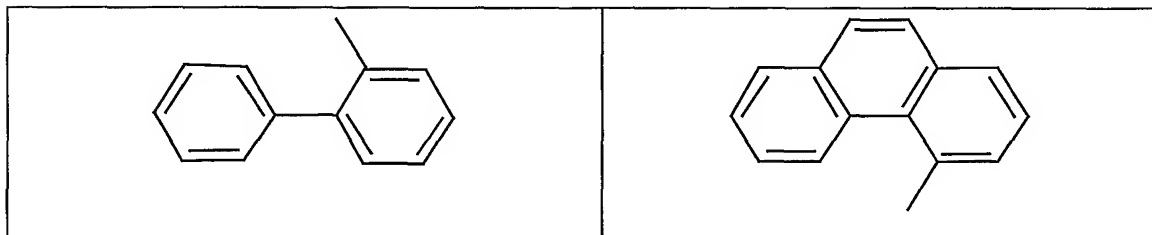

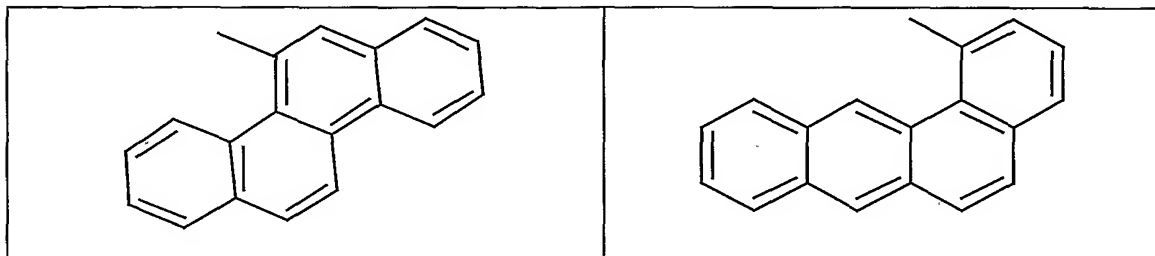

Suitable mixed-ligand Group 13 complexes can include fused rings or ring assemblies with *ortho*-substituents, or ring junctions, so long as those ligands do not exceed two in number. Thus Group 13 anions with one or two hindered fused ring aromatics with three or two unhindered ligands, where hindered aromatics are those having *ortho* substituents or ring junctions (illustration II) and unhindered are those without (illustration I), will typically be suitable. Tris(perfluorophenyl) (perfluoroanthracyl) borate is an illustrative complex. In this complex the anthracyl ligand is a hindered fused ring having *ortho*-substituents but its use with three unhindered phenyl ligands allows the complex to adopt a tetrahedral structure. Thus, generically speaking, the Group 13 complexes useful in a accordance with the invention will typically conform to the following formula :



where, M is a Group 13 element, A is an unhindered ligand as described above, B is a hindered ligand as described above, and $n = 1, 2$.

For both fused aromatic rings and aromatic ring assemblies, halogenation is highly preferred so as to allow for increased charge dispersion that contributes along with steric bulk as independent features decreasing the likelihood of ligand abstraction by the strongly Lewis acidic metallocene cation formed in the catalyst activation. Additionally, halogenation inhibits reaction of the hafnium cation with any remaining carbon-hydrogen bonds of the aromatic rings, and perhalogenation precludes such potential undesirable reactions. Thus it is preferred that at least one third of hydrogen atoms on carbon atoms of the aryl ligands can be replaced by halogen atoms, and more preferred that the aryl ligands be perhalogenated. Fluorine is the most preferred halogen.

Means of preparing ionic catalyst systems comprising catalytically active cations of the hafnium compounds and suitable noncoordinating anions are conventionally known, see for example U.S. patent 5,198,401, WO 92/00333, and WO 97/22639. Typically the methods comprise obtaining from commercial
5 sources or synthesizing the selected transition metal compounds comprising an abstractable ligand, e.g., hydride, alkyl or silyl group, and contacting them with a noncoordinating anion source or precursor compound in a suitable solvent. The anion precursor compound abstracts a univalent hydride, alkyl or silyl ligand that completes the valency requirements of the preferred hafnium metallocene
10 compounds. The abstraction leaves the hafnocenes in a cationic state which is counterbalanced by the stable, compatible and bulky, noncoordinating anions according to the invention.

The noncoordinating anions are preferably introduced into the catalyst preparation step as ionic compounds having an essentially cationic complex which
15 abstracts a non-cyclopentadienyl, labile ligand of the transition metal compounds which upon abstraction of the non-cyclopentadienyl ligand, leave as a by-product the noncoordinating anion portion. Hafnium compounds having labile hydride, alkyl, or silyl ligands on the metal center are highly preferred for the ionic catalyst systems of this invention since known *in situ* alkylation processes may result in
20 competing reactions and interactions that tend to interfere with the overall polymerization efficiency under high temperature conditions in accordance with the preferred process embodiments of the invention.

Suitable cations for precursor compounds capable of providing the noncoordinating anions of the invention cocatalysts include those known in the
25 art. Such include the nitrogen-containing cations such as those in U.S. patent 5,198,401, the carbenium, oxonium or sulfonium cations of US patent 5,387,568, metal cations, e.g., Ag^+ , the silylium cations of WO 96/08519, and the hydrated salts of Group 1 or 2 metal cations of WO 97/22635. Each of the documents of this paragraph are incorporated by reference for purposes of U.S. patent practice.

30 Examples of preferred precursor salts of the noncoordinating anions capable of ionic cationization of the metallocene compounds of the invention, and consequent stabilization with a resulting noncoordinating anion include trialkyl-


substituted ammonium salts such as triethylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tripropylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(n-butyl)ammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, trimethylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, trimethylammonium tetra tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tripropylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl), tributylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tributylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(n-butyl)ammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like; N,N-dialkyl anilinium salts such as N,N-dimethylanilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, N,N-diethylanilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, N,N-2,4,6-pentamethylanilinium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like; dialkyl ammonium salts such as di-(isopropyl)ammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, dicyclohexylammonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like; and triaryl phosphonium salts such as triphenylphosphonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(methylphenyl)phosphonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron, tri(dimethylphenyl)phosphonium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)boron and the like.

Further examples of suitable anionic precursors include those comprising a stable carbenium ion, and a compatible non-coordinating anion. These include tropillium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, triphenylmethylium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, benzene (diazonium) tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-

biphenyl) borate, tropillium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, triphenylmethylium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, benzene (diazonium) tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl) borate, tropillium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, triphenylmethylium tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate, benzene (diazonium) tetrakis(perfluoronaphthyl) or tetrakis(perfluoro-4-biphenyl)borate. The essentially structurally equivalent silylium borate or aluminate salts are similarly suitable.

In yet another embodiment, the NCA portion comprises an acetylene group and is sometimes referred to as an "acetyl-aryl" moiety. A distinguishing feature of invention NCAs is the presence of an acetylenic functional group bound to a Group-13 atom. The Group-13 atom also connects to at least one fluorinated ring moiety: monofluorinated up through perfluorinated. In addition to a first ring moiety, the Group-13 atom has two other ligands that may also be ring moieties similar to or different from the first ring moiety and may be monofluorinated to perfluorinated. The goal of fluorination is to reduce the number of abstractable hydrogen. A ligand is referred to as substantially fluorinated when enough hydrogen has been fluorine-replaced so that the amount of remaining abstractable hydrogen is small enough that it does not interfere with commercial polymerization.

An exemplary invention NCA is shown below.

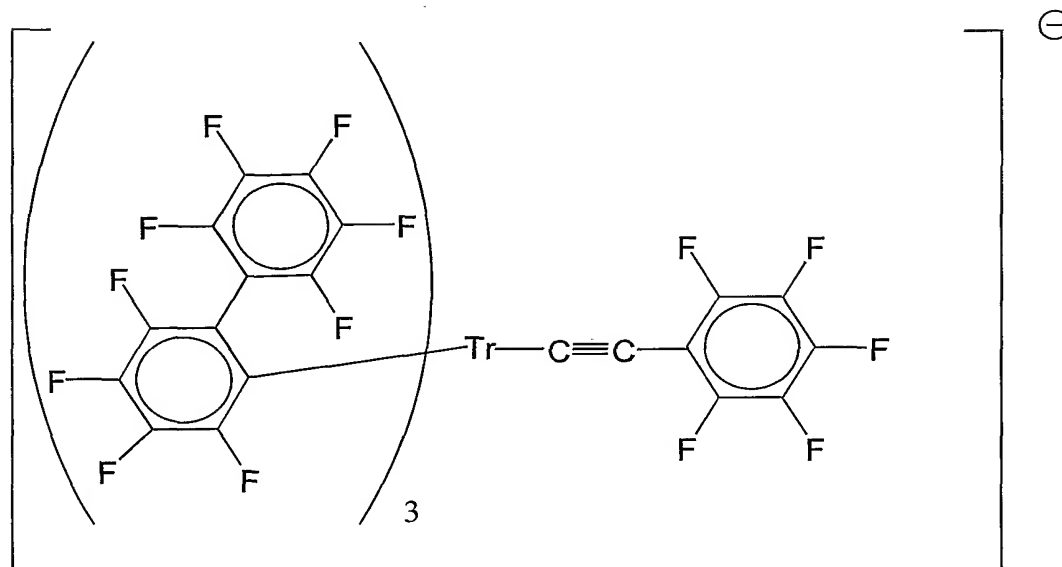

Tr stands for triel, which, for this disclosure, encompasses B and Al.
 5 When Tr=B, this NCA is called tris(2',3,3',4,4',5,5',6,6'-nonafluorobiphen-2-yl)(2-perfluorophenylethyn-2-yl)borate.

The cationic portion of activators according to this embodiment preferably has the form R_3PnH , wherein R represents an alkyl or aryl moiety; Pn represents a pnictide; N, P, or As; and H is hydrogen. Suitable R are shown below. This list
 10 does not limit the scope of the invention; any R that allows the cationic portion to function as described is within the scope of this invention. R includes, but is not limited to, methyl, phenyl, ethyl, propyl, butyl, hexyl, octyl, nonyl, 3-ethylnonyl, isopropyl, n-butyl, cyclohexyl, benzyl, trimethylsilyl, triethylsilyl, tri-n-propylsilyl, tri-isopropylsilyl, methylethylhexylsilyl, diethylnonylsilyl, triethylsilylpropyl, 2,2-dimethyloctyl, triethylsilylethyl, tri-n-propylsilylhexyl, tri-
 15 isopropylsilyloctyl, and methyldiethylsilyloctyl.

Properties and Analysis of the Copolymer

Elongation and Tensile Strength

Elongation and tensile strength were measured as described below. The copolymers of the current invention have an elongation of greater than 1000%, or greater than 1200%, or greater than 1500%.

The copolymers of the current invention have a tensile strength greater than 300 psi (2.1 MPa), or greater than 500 psi (3.5 MPa) or greater than 1000 psi (6.9 MPa).

Tensile and elongation properties are determined at 20 in/min (51 cm/min) according to the procedure described in ASTM D790. The data is reported in engineering units with no correction to the stress for the lateral contraction in the specimen due to tensile elongation. The tensile and elongation properties of embodiments of our invention are evaluated using dumbbell-shaped samples. The samples are compression molded at 180°C to 200°C for 15 minutes at a force of 15 tons (133 kN) into a plaque of dimensions of 6 in x 6 in (15 cm x 15 cm). The cooled plaques are removed and the specimens are removed with a die. The elasticity evaluation of the samples is conducted on an Instron 4465, made by Instron Corporation of 100 Royall Street, Canton, MA. The digital data is collected in a file collected by the Series IX Material Testing System available from Instron Corporation and analyzed using Excel 5, a spreadsheet program available from Microsoft Corporation of Redmond, WA.

Elasticity

Embodiments of our invention are elastic after tensile deformation. The elasticity, represented by the fractional increase in the length of the sample, represented as percent of the length of the sample, is measured according to the general procedure ASTM D790. During tensile elongation, the copolymer sample is stretched, and the polymer attempts to recover its original dimensions when the stretching force is removed. This recovery is not complete, and the final length of the relaxed sample is slightly longer than that of the original sample. Elasticity is represented by the fractional increase in the length of the sample, expressed as a percent of the length of the original un-stretched sample.

The protocol for measuring the elasticity of the sample consists of prestretching the deformable zone of the dumbbell, made according to the procedure described above for the measurement of elongation and tensile strength, which is the narrow portion of the specimen, to 200% of its original length to
5 prestretch the sample. This is conducted at a deformation rate of 10 inches (25 cm) per minute. The sample is relaxed at the same rate to form an analytical specimen which is a prestretched specimen of the original sample. This slightly oriented, or prestretched, sample is allowed to relax for 48 hours, at room temperature, prior to the determination of elasticity. The length of the deformation
10 zone in the sample is measured to be d_1 . After the 48 hours, it is again deformed at 10 inches per minute for a 200% extension of the deformation zone of the sample and allowed to relax at the same rate. The sample is removed and after 10 minutes of relaxation the sample is measured to have a new length of the deformation zone of d_2 . The elasticity of the sample as a percent is determined as $100 \cdot (d_2 - d_1) / d_1$.

15 Embodiments of the invention have elasticity, as measured by the procedure described above, of less than 30%, or less than 20%, or less than 10%, or less than 8% or less than 5%.

These values of the elasticity over the range of composition of the copolymer vary with the tensile strength of the sample as measured by the 500%
20 tensile modulus. Elasticity of this family of copolymers is thus represented by two criteria: (a) extensibility to 500% elongation with a measurable modulus (500% tensile modulus) and (b) elasticity from an extension to 200% elongation on a slightly oriented sample as described above. First, the copolymer of embodiments of our invention should have a measurable tensile strength at 500% elongation
25 (also known as 500% tensile modulus), of greater than 0.5 MPa, or greater than 0.75 MPa, or greater than 1.0 MPa, or greater than 2.0 MPa; and second, the copolymer should have the above-described elasticity.

Alternatively, the relationship of elasticity to 500% tensile modulus may be described. Referring to Figure 3, elasticity is plotted versus 500% tensile
30 modulus in MPa for copolymers of the invention. The plotted data correspond to Samples 5-14 in Table 6 of the Examples herein. A linear regression fit of the data yields a relationship of:

$$\text{Elasticity (\%)} = 0.9348M - 1.0625$$

where M is the 500% tensile modulus in MPa. In embodiments of the present invention, the elasticity as a function of 500% tensile modulus in MPa is defined by:

- 5 Elasticity (%) $\leq 0.935M + 12$; or
 Elasticity (%) $\leq 0.935M + 6$; or
 Elasticity (%) $\leq 0.935M$.

Flexural Modulus

10 Softness of the copolymers of embodiments of the invention may be measured by flexural modulus. Flexural modulus is measured in accordance with ASTM D790, using a Type IV dogbone at crosshead speed of 0.05 in/min (1.3 mm/min). The values of the flexural modulus over the range of composition of the copolymer vary with the tensile strength of the sample as measured by the

15 500% tensile modulus. Flexural modulus of this family of copolymers is thus represented by two criteria: (a) extensibility to 500% elongation with a measurable modulus (500% tensile modulus); and (b) flexural modulus.

Referring to Figure 2, flexural modulus in MPa is plotted versus 500% tensile modulus in MPa for copolymers of the invention. The plotted data

20 correspond to Samples 15-19 in Table 7 of the Examples herein. A single exponential fit of the data yields a relationship of:

$$\text{Flexural Modulus (MPa)} = 4.1864e^{0.269M}$$

where M is the 500% tensile modulus in MPa. In embodiments of the present invention, the flexural modulus in MPa as a function of 500% tensile modulus in

25 MPa is defined by:

- Flexural Modulus $\leq 4.2e^{0.27M} + 50$; or
 Flexural Modulus $\leq 4.2e^{0.27M} + 30$; or
 Flexural Modulus $\leq 4.2e^{0.27M} + 10$; or
 Flexural Modulus $\leq 4.2e^{0.27M} + 2$.

Ethylene Composition

The composition of ethylene propylene copolymers is measured as ethylene wt. % according to ASTM D3900 as follows. A thin homogeneous film of the copolymer component, pressed at a temperature of at or greater than 150°C, is mounted on a Perkin Elmer PE 1760 infra red spectrophotometer. A full spectrum of the sample from 600 cm⁻¹ to 4000 cm⁻¹ is recorded, and the ethylene weight percent of the copolymer component is calculated from:

$$\text{Ethylene wt. \%} = 82.585 - 111.987X + 30.045X^2$$

where X is the ratio of the peak height at 1155 cm⁻¹ to peak height at either 722 cm⁻¹ or 732 cm⁻¹, which ever is higher.

Molecular Weight and PDI

Techniques for determining the molecular weight (Mn and Mw) and molecular weight distribution (MWD) are found in U.S. Patent No. 4,540,753, and in *Macromolecules*, 1988, volume 21, p. 3360 (Verstrate et al).

Melting Point and Heat of Fusion

Melting point and heat of fusion are measured by Differential Scanning Calorimetry (DSC) follows. About 6 to 10 mg of a sheet of the polymer pressed at approximately 200°C to 230°C is removed with a punch die. This is annealed at room temperature for 24 hours. At the end of this period, the sample is placed in a Differential Scanning Calorimeter (Perkin Elmer 7 Series Thermal Analysis System) and cooled to about -50°C to about -70°C. The sample is heated at 20°C/min to attain a final temperature of about 200°C to about 220°C. The thermal output is recorded as the area under the melting peak of the sample, which is typically peaked at about 30°C to about 175°C and occurs between the temperatures of about 0°C and about 200°C, and is measured in joules as a measure of the heat of fusion. The melting point is recorded as the temperature of the greatest heat absorption within the range of melting of the sample.

Intermolecular Composition and Tacticity Distribution Determination

Intermolecular composition distribution of the copolymer is measured as described below. Nominally 30 grams of the copolymer is cut into small cubes with about 1/8" (3 mm) sides. This is introduced into a thick-walled glass bottle with a screw cap closure, along with 50 mg of Irganox1076, an antioxidant commercially available from Ciba-Geigy Corporation. Then, 425 mL of hexane (a principal mixture of normal and iso isomers) is added to the bottle and the sealed bottle is maintained at 23°C for 24 hours. At the end of this period, the solution is decanted and the residue is treated with additional hexane for an additional 24 hours. At the end of this period, the two hexane solutions are combined and evaporated to yield a residue of the polymer soluble at 23°C. To the residue is added sufficient hexane to bring the volume to 425 mL and the bottle is maintained at 31°C for 24 hours in a covered circulating water bath. The soluble polymer is decanted and an additional amount of hexane is added for another 24 hours at 31°C prior to decanting. In this manner, fractions of the copolymers soluble at 40°C, 48°C, 55°C and 62°C are obtained at temperature increases of approximately 8°C between stages. Increases in temperature to 95°C can be accommodated if heptane, instead of hexane, is used as the solvent for all temperatures above about 60°C. The soluble polymers are dried, weighed and analyzed for composition, as wt. % ethylene content, by the IR technique described above. Soluble fractions obtained in the adjacent temperature fractions are the adjacent fractions in the specification above.

EXAMPLES

Example 1: Ethylene/propylene copolymerization

Continuous polymerization of the polymer is conducted in a 9 liter Continuous Flow Stirred Tank Reactor using hexane as the solvent. The liquid full reactor has a residence time of 9 minutes and the pressure is maintained at 700 kPa. A mixed feed of hexane, ethylene and propylene is pre-chilled to approximately -30°C to remove the heat of polymerization, before entering the reactor. Solutions of catalyst/activator in toluene and the scavenger in hexane are

separately and continuously admitted into the reactor to initiate the polymerization. The reactor temperature is maintained between 35 and 50°C, depending on the target molecular weight. The feed temperature is varied, depending on the polymerization rate to maintain a constant reactor temperature.

The polymerization rate is varied from about 0.5 kg/hr to about 4 kg/hr. Hexane at 30 kg/hr is mixed with ethylene at 717 g/hr and propylene at 5.14 kg/hr and fed to the reactor. The polymerization catalyst, dimethylsilyl bridged bis-indenyl hafnium dimethyl activated 1:1 molar ratio with N',N'-dimethyl anilinium-tetrakis (pentafluorophenyl)borate is introduced at the rate of at 0.0135 g/hr. A dilute solution of triisobutyl aluminum is introduced into the reactor as a scavenger of catalyst terminators; a rate of approximately 111 mol of scavenger per mole of catalyst is adequate for this polymerization. After the polymerization reaches steady state, a representative sample of the polymer produced in this polymerization is collected, and then steam-distilled to isolate the polymer. The polymerization rate is measured as 3.7 kg/hr. The polymer produced in this polymerization has an ethylene content of 14%, ML (1+4) 125°C (Mooney Viscosity) of 13.1 and has isotactic propylene sequences.

Variations in the composition of the polymer are obtained principally by changing the ratio of ethylene to propylene. Molecular weight of the polymer is varied by either changing the reactor temperature or by changing the ratio of total monomer feed rate to the polymerization rate.

In the manner described in Example 1 above, polymers of the above specification are synthesized. These are described in the tables below. Table 2 describes the results of the GPC, composition, and DSC analysis for the polymers.

Table 2: Analysis of the polymers

Sample #	¹³ C NMR RESULTS					DSC Results	
	Ethylene (wt%)	Triad (mm)	2,1 insertion (%)	1,3 insertion (%)	m/r	Heat of fusion (J/g)	Melting Point (°C)
#1	11.0	90.1	0.63	0.098	7.1	19	49
#2	18.5	91.3	0.84	0.12	6.2	1.8	50
#3	9.4	91.8	0.80	0.086	6.9	27	69
#4	14.1	90.6	0.74	0.13	7.7	8.0	51

Table 3: Fractional solubility of copolymer (hexane)

Sample #	Wt % soluble at T		
	23°C	31°C	40°C
1	39.2	60.0	0.5
2	97.6	2.1	
3	0.7	52.3	48.1
4	99.3	0.7	

Table 4 describes the composition of the fractions of the copolymer obtained in Table 3. Only fractions which have more than 4% of the total mass of the polymer have been analyzed for composition.

Table 4: Composition of fractions of the copolymer component obtained in Table 3

Sample #	Composition (wt % C2) for fraction soluble at T		
	23°C	31°C	40°C
1	10.8	11.3	-
2	17.9	-	
3	-	9.9	10.2
4	14.5	-	

The experimental inaccuracy in the determination of the ethylene content is believed to be approximately 0.4 wt% absolute.

Table 5: Mechanical properties of the polymers

Sample #	Mechanical Properties		
	Tensile Strength (psi, MPa)	500% Tensile Modulus (psi, MPa)	Elasticity (%)
1	3226.5, 22.25	1412, 9.74	17
2	334.0, 2.30	129, 0.889	1.5
3	5041.3, 34.76	2300, 15.86	24
4	1277.7, 8.810	387, 2.67	0

Table 6: Mechanical properties of the polymers

Sample #	Composition	Mechanical Properties	
	Ethylene Content (wt %)	500% Tensile Modulus (MPa)	Elasticity (%)
5	12.4	6.8	3.1
6	12.0	7.9	1.6
7	17.0	0.9	1.6
8	11.1	9.9	18.8
9	10.8	8.9	6.4
10	12.1	6.9	3.1
11	13.4	6.4	1.6
12	14.8	2.7	0
13	16.4	0.6	3.1
14	13.4	7.1	4.7

Table 7: Mechanical properties of the polymers

Sample #	Composition	Mechanical Properties	
	Ethylene Content (wt %)	500% Tensile Modulus (MPa)	Flexural Modulus (MPa)
15	12.0	7.9	26.8
16	14.8	2.7	9.2
17	17.0	0.9	5.6
18	10.8	8.9	40.1
19	10.0	10.3	93.0

5 Example 2: Ethylene/propylene copolymerization

Continuous Polymerization of the polymer was conducted in a 1 liter internal volume Continuous Flow Stirred Tank Reactor using hexane as the solvent. The liquid full reactor had a variable residence time of approximately 9 to 15 minutes (as described in the table below) and the pressure was maintained at 700 kpa. A mixed feed of Hexane, ethylene and propylene was pre-chilled to approximately -30°C to remove the heat of polymerization, before entering the reactor. The pre-chilling temperature was adjusted to maintain indicated solution polymerization temperature. The solution of catalyst/activator in Toluene and the

scavenger in hexane were separately and continuously admitted into the reactor to initiate the polymerization. The reactor temperature was maintained between 50 and 95°C and the polymerization rate could be varied from 0.1 kg/hr to 0.5 kg/hr as shown in Tables 8 through 13, below.

5 Hexane, ethylene, and propylene were fed to the reactor at the rates shown in Tables 8 through 12. The polymerization catalyst, dimethyl silyl bridged bis-indenyl Hafnium dimethyl was activated in vitro with 1:1 molar ratio with NCA indicated below in the tables and introduced into the polymerization reactor at the rate of 0.0135 g/hr. Two NCA's were used: N', N'-Dimethyl anilinium-tetrakis
10 (pentafluorophenyl)borate (A1) and N, N'-Dimethyl anilinium-tetrakis (heptafluoro-1-naphthyl)borate (A2). A dilute solution of triisobutyl aluminum was introduced into the reactor as a scavenger of catalyst terminators. A rate of approximately 1.11 mole of scavenger per mole of catalyst was adequate for this polymerization. After five residence times of steady polymerization, a
15 representative sample of the polymer produced in this polymerization was collected. The solution of the polymer was withdrawn from the top, and then steam distilled to isolate the polymer. The polymerization rate was measured as shown in the tables below. The polymer produced in this polymerization was analyzed for ethylene content by FT-IR, molecular weight averages by GPC.
20 Crystallinity was measured by DSC and the amount of mm triads of propylene residues in the polymer chain was determined by ¹³C NMR. As we have mentioned above the crystallinity and mm triads determination are redundant determinations since the crystallinity of the polymers are dependent only on the isotactic propylene residues.

25 The data in the tables below shows the effect of the changes in the polymerization conditions (temperature, NCA and residual monomer concentration) on propylene / ethylene copolymers made at two distinct compositions. The first composition contains approximately 7 wt% ethylene and the second contains approximately 14 wt% ethylene. The data will show that the
30 benefits of the invention are available across the composition range for these propylene-ethylene polymers.

5 This example illustrates the difference in the polymerization of A1 and A2 with the polymerization being conducted at a range of increasing temperatures between 50°C and 95°C. For each polymerization condition temperature the same polymerization monomer, solvent and catalyst feed are used to make polymers of essentially identical composition. For any activator the rise in the polymerization temperature lowers the crystallinity and molecular weight of the polymer, however the replacement of A1 by A2 raises both the crystallinity as well as the molecular-weight.

Table 8: Polymerization Conditions and Polymer Products

		Polymerization Reactor					Polymer				
Sample #	NCA	Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ (moles/l)	C ₂ = wt%*	mm % ¹³ C NMR	Mw (x 1000)	Tm (°C)
20-C	A1	50	3.56	24	438	0.30	0.58	6.5	92	148	91
21-C	A1	65	3.56	24	438	0.29	0.62	6.8	85	67	85
22-C	A1	80	3.56	24	438	0.29	0.63	7.1	83	44	71
23-C	A1	95	3.56	24	438	0.28	0.69	8.4	77	22	62
24	A2	50	3.56	24	438	0.30	0.59	7.2	93	290	110
25	A2	65	3.56	24	438	0.29	0.65	7.5	91	215	101
26	A2	80	3.56	24	438	0.28	0.69	7.7	90	150	96
27	A2	95	3.56	24	438	0.28	0.68	8.5	89	80	83

* Understood to mean units derived from ethylene

Samples 20-C through 23-C (comparative) and 24 through 27:

This example illustrates the difference in the polymerization of A1 and A2 with the polymerization being conducted at a temperature of 95°C. During each series of polymerization the composition of the polymer is held essentially constant but the residual level of monomer is progressively raised. For both A1 and A2 activated polymerization the rise in the residual monomer concentration raises the crystallinity of the propylene residues in the polymer.

Table 9: Polymerization Conditions and Polymer Products

Sample #	NCA	Polymerization Reactor					Polymer				
		Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ (mole/l)	C ₂ wt%	mm % ¹³ C NMR	Mw (x 1000)	Tm (°C)
28C	A1	95	3.56	24	438	0.28	0.69	8.4	77	22	62
29C	A1	95	3.17	24	438	0.27	0.81	8.7	79	25	64
30C	A1	95	3.17	27.6	504	0.32	0.83	6.9	81	26	66
31C	A1	95	3.17	31.7	579	0.40	0.84	7.4	81	28	67
32	A2	95	3.56	24	438	0.29	0.65	7.8	89	87	64
33	A2	95	3.56	27	504	0.36	0.63	7.8	91	88	72
34	A2	95	3.17	27	504	0.35	0.73	7.8	91	101	87
35	A2	95	3.17	31.2	582	0.40	0.84	7.8	94	102	95
36	A2	95	2.77	31.2	582	0.42	0.85	7.8	95	120	102

Samples 28-C through 31-C (comparative) and 32 through 36:

5 This example illustrates the difference in the polymerization of A1 and A2 with the polymerization being conducted at a temperature of 95°C. During each series of polymerization the composition of the polymer is held essentially constant but the residual level of monomer is progressively raised. For both A1 and A2 activated polymerization the rise in the residual monomer concentration raises the crystallinity of the propylene residues in the polymer. The examples differ from the data in examples immediately earlier in that a propylene-ethylene copolymer having a higher ethylene content was made. These data in conjunction
10 indicate that the effect of the replacement of A1 by A2 is not limited by the ethylene content of the polymer.

Table 10: Polymerization Conditions and Polymer Products

Sample #	NCA	Polymerization reactor					Polymer				
		Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ (mole/l)	C ₂ wt%	Mw (x 1000)	T _m (°C)	H _f (J/g)
37C	A1	95	3.56	45	438	0.36	0.52	16.9	28	no	na
38C	A1	95	3.56	52.2	504	0.37	0.70	14.8	34	no	na
39C	A1	95	3.17	52.2	504	0.37	0.79	17.8	34	no	na
40C	A1	95	3.17	60	582	0.35	1.13	16.9	45	47	0.14
41C	A1	95	2.77	60	582	0.41	1.01	15.3	47	48	0.78
42	A2	95	3.56	45	438	0.36	0.52	17.2	108	45	0.22
43	A2	95	3.56	52.2	504	0.37	0.70	14.9	107	46	6.4
44	A2	95	3.17	52.2	504	0.37	0.75	15.1	110	45	6.8
45	A2	95	3.17	60	582	0.35	1.14	17.6	113	47	5.7
46	A2	95	2.77	60	582	0.41	1.04	17.0	123	48	6.8

Samples 37-C through 41-C (comparative) and 42 through 46:

5 This example illustrates the difference in the polymerization of A1 and A2 with the polymerization being conducted at a range of increasing temperatures between 50°C and 95°C. For each polymerization condition temperature the same polymerization monomer, solvent and catalyst feed are used to make polymers of essentially identical composition. For any activator the rise in the polymerization temperature lowers the crystallinity and molecular weight of the polymer, however the replacement of A1 by A2 raises both the crystallinity as well as the molecular weight. The examples differ from the data in examples 1-8 earlier in 10 that a propylene-ethylene copolymer having a higher ethylene content was made. These data in conjunction indicate that the effect of the replacement of A1 by A2 is not limited by the ethylene content of the polymer.

Table 11: Polymerization Conditions and Polymer Products

Sample #	NCA	Polymerization Reactor					Polymer				
		Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ (mole/l)	C ₂ wt%	Mw (x 1000)	T _m (°C)	H _f (J/g)
47C	A1	50	3.56	45	438	0.31	0.66	14.9	113	43	6.3
48C	A1	65	3.56	45	438	0.30	0.68	15.2	86	44	0.7
49C	A1	80	3.56	45	438	0.29	0.70	15.0	67	no	na
50C	A1	95	3.56	45	438	0.30	0.69	15.3	33	no	na
51	A2	50	3.56	45	438	0.31	0.65	14.0	245	43	17
52	A2	65	3.56	45	438	0.30	0.68	15.0	208	44	13
53	A2	80	3.56	45	438	0.29	0.71	15.5	142	46	9.1
54	A2	95	3.56	45	438	0.30	0.69	15.3	91	47	2.8

Samples 47-C through 50-C (comparative) and 51 through 54:

5 In these examples similar data is shown for propylene ethylene polymers containing isotactic propylene crystallinity which have the polymerization conducted at a higher steady state propylene concentration than those reported previously above. Comparative examples 69-C to 76-C have data for polymers of the similar composition made with A1.

Samples 55 through 68 and 69-C through 76-C (comparative):

10 The heat of fusion data for the polymers of examples 55 through 68 and the data for the comparative examples 69-C to 76-C is plotted in Figure 5 which shows that the activators of the invention have an ability to make a polymer of a higher crystallinity than the comparative examples.

Samples 77-C through 80-C (comparative):

15 Comparative examples 77-C to 80-C show the comparison of the Mooney viscosity (Mooney viscosity measured as ML (1+4) at 127°C in Mooney units according to ASTM D-1646) of the polymer made with A1 for comparison to the data in examples 55 through 68. Since the Mooney viscosity of the copolymers is strongly dependent on the steady state monomer concentrations the data is plotted
20 as a function of the monomer concentration and the polymerization temperature. The data demonstrates that the copolymers made with A1 have a lower Mooney viscosity than those made with A2 at similar or higher polymerization temperature. This is shown in Figure 6.

Table 12: Polymerization Conditions and Polymer Products

	Polymerization Reactor							Polymer			
Sample #	NCA	Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ wt% in Hexane	C ₂ wt% ML@12 7°C	T _m (°C)	H _f (J/g)	
19	A2	60	3.56	75	812	0.49	10.8	13.70	15.3	45	19.3
20	A2	60	3.56	75	812	0.44	12.3	14.70	16.1	46	11.14
21	A2	60	3.56	75	812	0.41	13.2	17.92	20.6	46	10.6
22	A2	70	3.56	75	812	0.43	12.7	16.10	11.6	47	8.6
23	A2	70	3.56	65	812	0.35	14.5	14.70	16.6	46	13.5
24	A2	70	3.56	60	812	0.36	14.1	13.57	16.9	46	15.8
24	A2	70	3.56	58	812	0.26	16.4	14.76	19.9	46	13.4
26	A2	80	3.56	75	812	0.50	11.1	16.20	6.7	45	16.5
27	A2	80	3.56	70	812	0.45	12.2	15.97	7.9	45	15.5
28	A2	80	3.56	70	812	0.40	13.3	15.41	11	46	12
29	A2	90	3.56	75	812	0.49	11.1	14.32	4.1	46	15
30	A2	90	3.56	75	812	0.41	13.2	16.15	4.8	49	7.3
31	A2	90	3.56	67	812	0.36	14.2	14.94	5.2	46	13.2
32	A2	90	3.56	60	812	0.28	16.0	15.26	6.6	46	9.8

Table 13: Polymer Products

Sample #	NCA	Polymer		
		C ₂ =wt%	T _m (°C)	H _f (J/g)
69-C	Al	11	45	19
70-C	Al	11.9	46	19
71-C	Al	12.4	46	17
72-C	Al	13	47	16
73-C	Al	14.1	46	8
74-C	Al	14.2	46	8
75-C	Al	16.3	46	3.5
76-C	Al	18.5	45	1.8

Table 14: Polymerization Conditions and Polymer Products

		Polymerization Reactor					Polymer		
Sample #	NCA	Temp (°C)	Hexane Solvent (kg/hr)	Ethylene (g/hr)	Propylene (g/hr)	Polymer Product (kg/hr)	Steady State C ₃ = wt% in C6	C ₂ wt%	ML@127° C
77-C	AI	60	3.56	75	812	0.49	10.8	12.83	2.8
78-C	AI	60	3.56	75	812	0.44	12.3	11.54	3.3
79-C	AI	60	3.56	75	812	0.41	13.2	12.31	5.4
80-C	AI	60	3.56	75	812	0.43	12.7	14.63	9.8

Although the present invention has been described in considerable detail with reference to certain aspects and embodiments thereof, other aspects and embodiments are possible. For example, while ethylene propylene copolymers have been exemplified, other copolymers are also contemplated. Therefore, the spirit and scope of the appended claims should not be limited to the description of the versions contained herein.

Certain features of the present invention are described in terms of a set of numerical upper limits and a set of numerical lower limits. It should be appreciated that ranges from any lower limit to any upper limit are within the scope of the invention unless otherwise indicated.

All patents, test procedures, and other documents cited in this application are fully incorporated by reference to the extent such disclosure is not inconsistent with this application and for all jurisdictions in which such incorporation is permitted.

What is claimed is:

CLAIMS

1. A process comprising:
- 5 a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a polymerization catalyst complex comprising:
- i) an organometallic Group 4 transition metal compound; and
- ii) an activating cocatalyst, wherein said catalyst complex is capable of producing stereospecific polypropylene; and
- 10 b) recovering a propylene copolymer containing units derived from propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the copolymer has a melting point of from greater than 35°C to less than 110°C, and a weight average
- 15 molecular weight of:
- $$Mw > 6.10 * P * e^{(3370/T)}$$
- wherein:
- Mw = the weight average molecular weight
- T = the polymerization reaction temperature in degrees
- 20 Kelvin
- P = the steady state propylene concentration in the polymerization reaction zone in moles per liter.
2. The process of claim 1 wherein said propylene copolymer contains units
- 25 derived from propylene in an amount of from 80 to 90 weight percent.
3. The process of claim 1 wherein said propylene copolymer contains units derived from ethylene in an amount of from 10 to 25 weight percent.
- 30 4. The process of claim 1 wherein said homogeneous polymerization conditions are adiabatically conducted in a continuous polymerization process.

5. The process of claim 4 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least 500 bar.
- 5 6. The process of claim 1 wherein the reaction temperature is in a range of 60 °C to 200 °C.
7. The process of claim 1 wherein said propylene copolymer has a melting point of from less than 90°C to greater than 40°C.
- 10 8. The process of claim 1 wherein said propylene copolymer has a heat of fusion of greater than 1.0 J/g to less than 75J/g.
9. The process of claim 1 wherein said propylene copolymer has a heat of fusion of greater than 4.0 J/g to less than 30J/g.
- 15 10. The process of claim 1 wherein said organometallic Group 4 transition metal compound comprises two cyclopentadienyl ligands covalently bridged by a substituted or unsubstituted carbon atom or a substituted or unsubstituted silicon atom, wherein said Group 4 transition metal compound is chiral.
- 20 11. The process of claim 10 wherein said Group 4 metal is hafnium.
- 25 12. The process of claim 10 wherein said bridge atom is substituted with at least one methyl group.
13. The process of claim 10 wherein said cyclopentadienyl ligands are indenyl.
- 30 14. A process comprising:

- a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a polymerization catalyst complex comprising:
- 5 i) an organometallic Group 4 transition metal compound; and
- ii) an activating cocatalyst, wherein said catalyst complex is capable of producing stereospecific polypropylene; and
- b) recovering a propylene copolymer containing units derived from propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the
- 10 copolymer has a melting point of from greater than 35°C to less than 110°C, and a triad tacticity of greater than 85%.
15. The process of claim 14 wherein said propylene copolymer contains units derived from propylene in an amount of from 80 to 90 weight percent.
- 15
16. The process of claim 14 wherein said propylene copolymer contains units derived from ethylene in an amount of from 10 to 25 weight percent.
17. The process of claim 14 wherein said homogeneous polymerization
- 20 conditions are adiabatically conducted in a continuous polymerization process.
18. The process of claim 17 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least
- 25 500 bar.
19. The process of claim 14 wherein the reaction temperature is in a range of 60 °C to 200 °C.
- 30 20. The process of claim 14 wherein said propylene copolymer has a melting point of from less than 90°C to greater than 40°C.

21. The process of claim 14 wherein said propylene copolymer has a heat of fusion of greater than 1.0 J/g to less than 75J/g.
22. The process of claim 14 wherein said propylene copolymer has a heat of fusion of greater than 4.0 J/g to less than 30J/g.
23. The process of claim 14 wherein said propylene copolymer has a a traid tacticity of greater than 90%.
24. The process of claim 14 wherein said organometallic Group 4 transition metal compound comprises two cyclopentadienyl ligands covalently bridged by a substituted or unsubstituted carbon atom or a substituted or unsubstituted silicon atom, wherein said Group 4 transition metal compound is chiral.
25. The process of claim 24 wherein said Group 4 metal is hafnium.
26. The process of claim 24 wherein said bridge atom is substituted with at least one methyl group.
27. The process of claim 24 wherein said cyclopentadienyl ligands are indenyl.
28. A process comprising:
- a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a polymerization catalyst complex comprising:
- i) an organometallic Group 4 transition metal compound; and
- ii) an activating cocatalyst, precursor ionic compound comprising a halogenated tetra-aryl-substituted Group 13 anion wherein each aryl substituent contains at least two cyclic aromatic rings,

wherein said catalyst complex is capable of producing stereospecific polypropylene; and

- b) recovering a propylene copolymer containing units derived from propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the copolymer has a melting point of from greater than 35°C to less than 110°C, and a weight average molecular weight of:

$$M_w > 6.10 \cdot P \cdot e^{(3370/T)}$$

wherein:

M_w = the weight average molecular weight

T = the polymerization reaction temperature in degrees Kelvin

P = the steady state propylene concentration in the polymerization reaction zone in moles per liter.

29. The process of claim 28 wherein said propylene copolymer contains units derived from propylene in an amount of from 80 to 90 weight percent.

30. The process of claim 28 wherein said propylene copolymer contains units derived from ethylene in an amount of from 10 to 25 weight percent.

31. The process of claim 28 wherein said homogeneous polymerization conditions are adiabatically conducted in a continuous polymerization process.

32. The process of claim 31 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least 500 bar.

33. The process of claim 28 wherein the reaction temperature is in a range of 60 °C to 200 °C.

34. The process of claim 28 wherein said propylene copolymer has a melting point of from less than 90°C to greater than 40°C.
- 5 35. The process of claim 28 wherein said propylene copolymer has a heat of fusion of greater than 1.0 J/g to less than 75J/g.
36. The process of claim 28 wherein said propylene copolymer has a heat of fusion of greater than 4.0 J/g to less than 30J/g.
- 10 37. The process of claim 28 wherein said organometallic Group 4 transition metal compound comprises two cyclopentadienyl ligands covalently bridged by a substituted or unsubstituted carbon atom or a substituted or unsubstituted silicon atom, wherein said Group 4 transition metal
- 15 compound is chiral.
38. The process of claim 37 wherein said Group 4 metal is hafnium.
39. The process of claim 37 wherein said bridge atom is substituted with at
- 20 least one methyl group.
40. The process of claim 37 wherein said cyclopentadienyl ligands are indenyl.
- 25 41. The process of claim 28 wherein said organometallic Group 4 transition metal compound is selected from:
- $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(Cl)}_2$,
- $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_3)_2$,
- $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(Cl)}_2$,
- 30 $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(CH}_3)_2$,
- $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_2\text{CH}_3)_2$, and



- 5 42. The process of claim 28 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprise at least one fused polycyclic aromatic ring.
- 10 43. The process of claim 28 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprises at least one aromatic ring pendant in the 4 position to a phenyl ligand.
44. The process of claim 28 wherein said halogenated tetraaryl Group 13 anion is [tetrakis(perfluoro-4-biphenyl)borate].
- 15 45. The process of claim 28 wherein said cocatalyst precursor compound comprises an essentially cationic complex selected from anilinium, ammonium, carbenium or silylium cationic complexes.
46. A process comprising:
- 20 a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a polymerization catalyst complex comprising:
- i) an organometallic Group 4 transition metal compound; and
- ii) an activating cocatalyst, precursor ionic compound comprising a halogenated tetra-aryl-substituted Group 13 anion wherein each aryl substituent contains at least two
- 25 cyclic aromatic rings,
- wherein said catalyst complex is capable of producing stereospecific polypropylene; and
- 30 b) recovering a propylene copolymer containing units derived from propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the

copolymer has a melting point of from greater than 35°C to less than 110°C, and a triad tacticity of greater than 85%.

- 5 47. The process of claim 46 wherein said propylene copolymer contains units derived from propylene in an amount of from 80 to 90 weight percent.
48. The process of claim 46 wherein said propylene copolymer contains units derived from ethylene in an amount of from 10 to 25 weight percent.
- 10 49. The process of claim 48 wherein said homogeneous polymerization conditions are adiabatically conducted in a continuous polymerization process.
50. The process of claim 46 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least 15 500 bar.
51. The process of claim 46 wherein the reaction temperature is in a range of 20 60 °C to 200 °C.
52. The process of claim 46 wherein said propylene copolymer has a melting point of from less than 90°C to greater than 40°C.
53. The process of claim 46 wherein said propylene copolymer has a heat of 25 fusion of greater than 1.0 J/g to less than 75J/g.
54. The process of claim 46 wherein said propylene copolymer has a heat of fusion of greater than 4.0 J/g to less than 30J/g.
- 30 55. The process of claim 46 wherein said propylene copolymer has a triad tacticity of greater than 90%.

56. The process of claim 46 wherein said organometallic Group 4 transition metal compound comprises two cyclopentadienyl ligands covalently bridged by a substituted or unsubstituted carbon atom or a substituted or unsubstituted silicon atom, wherein said Group 4 transition metal compound is chiral.
57. The process of claim 56 wherein said Group 4 metal is hafnium.
58. The process of claim 56 wherein said bridge atom is substituted with at least one methyl group.
59. The process of claim 56 wherein said cyclopentadienyl ligands are indenyl.
60. The process of claim 46 wherein said organometallic Group 4 transition metal compound is selected from:
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(Cl)}_2$,
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_3)_2$,
 $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(Cl)}_2$,
 $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(CH}_3)_2$,
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_2\text{CH}_3)_2$, and
 $\mu\text{-(C}_6\text{H}_5)_2\text{C(indenyl)}_2\text{Hf(CH}_3)_2$.
61. The process of claim 46 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprise at least one fused polycyclic aromatic ring.
62. The process of claim 46 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprises at least one aromatic ring pendant in the 4 position to a phenyl ligand.

63. The process of claim 46 wherein said halogenated tetraaryl Group 13 anion is [tetrakis(perfluoro-4-biphenyl)borate].
64. The process of claim 46 wherein said cocatalyst precursor compound
5 comprises an essentially cationic complex selected from anilinium, ammonium, carbenium or silylium cationic complexes.
65. A polymeric product prepared by olefin polymerization said product comprising:
- 10 a) a copolymer comprising 5 to 25 % by weight of ethylene-derived units and 95 to 75% by weight of propylene-derived units, the copolymer having:
- (i) a melting point of less than 90 °C;
- (ii) a relationship of elasticity to 500% tensile modulus such that
15
$$\text{Elasticity} \leq 0.935M + 12,$$
where elasticity is in percent and M is the 500% tensile modulus in MPa; and
- (iii) a relationship of flexural modulus to 500% tensile modulus such that
20
$$\text{Flexural Modulus} \leq 4.2e^{0.27M} + 50,$$
where flexural modulus is in MPa and M is the 500% tensile modulus in MPa; and
- b) anions containing a single coordination complex of a charge-bearing boron or aluminum core wherein said core is tetra-aryl-substituted
25 and each aryl substituent contains at least two cyclic aromatic rings.
66. A polymeric product prepared by olefin polymerization said product comprising:
- 30 a) a copolymer comprising 5 to 25 % by weight of ethylene-derived units and 95 to 75% by weight of propylene-derived units, the copolymer having:
- (i) a melting point of less than 90 °C;

- (ii) a relationship of elasticity to 500% tensile modulus such that
$$\text{Elasticity} \leq 0.935M + 12,$$
where elasticity is in percent and M is the 500% tensile modulus in MPa; and
- 5 (iii) a relationship of flexural modulus to 500% tensile modulus such that
$$\text{Flexural Modulus} \leq 4.2e^{0.27M} + 50,$$
where flexural modulus is in MPa and M is the 500% tensile modulus in MPa; and
- 10 b) anions containing a single coordination complex of a charge-bearing boron or aluminum core wherein said core has three halogenated aryl-ligands, wherein each aryl substituent contains at least two cyclic aromatic rings, and one acetyl-aryl moiety ligand.

15 **(EP CLAIMS)**

67. A process comprising:

- a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a
20 polymerization catalyst complex comprising:
- i) an organometallic Group 4 transition metal compound; and
 - ii) an activating cocatalyst, wherein said catalyst complex is capable of producing stereospecific polypropylene; and
- b) recovering a propylene copolymer containing units derived from
25 propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the copolymer has a melting point of from greater than 35°C to less than 110°C, and a weight average molecular weight of:

30
$$M_w > 6.10 \cdot P \cdot e^{(3370/T)}$$

wherein:

M_w = the weight average molecular weight

T = the polymerization reaction temperature in degrees Kelvin

P = the steady state propylene concentration in the polymerization reaction zone in moles per liter.

5

68. A process comprising:

a) polymerizing propylene and ethylene comonomers in a solution process at a reaction temperature at or above 60°C, with a polymerization catalyst complex comprising:

10

i) an organometallic Group 4 transition metal compound; and

ii) an activating cocatalyst, wherein said catalyst complex is capable of producing stereospecific polypropylene; and

b) recovering a propylene copolymer containing units derived from propylene in an amount greater than or equal to 75 weight percent, and units derived from ethylene in an amount of from 5 to 25 weight percent, wherein the copolymer has a melting point of from greater than 35°C to less than 110°C, and a triad tacticity of greater than 85%.

15

69. The process according to claim 67 or 68 wherein the activating cocatalyst comprises a halogenated tetra-aryl-substituted Group 13 anion wherein each aryl substituent contains at least two cyclic aromatic rings

20

70. The process of any of claims 67-69 wherein said organometallic Group 4 transition metal compound comprises two cyclopentadienyl ligands covalently bridged by a substituted or unsubstituted carbon atom or a substituted or unsubstituted silicon atom, wherein said Group 4 transition metal compound is chiral.

25

71. The process of any of claims 67-70 wherein said Group 4 metal is hafnium.

30

72. The process of claims 70 or 71 wherein said bridge atom is substituted with at least one methyl group.

73. The process of any of claims 70-72 wherein said cyclopentadienyl ligands are indenyl.
- 5 74. The process of any of claims 67-73 wherein said organometallic Group 4 transition metal compound is selected from:
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(Cl)}_2$,
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_3)_2$,
 $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(Cl)}_2$,
10 $\mu\text{-(CH}_3)_2\text{Si(tetrahydroindenyl)}_2\text{Hf(CH}_3)_2$,
 $\mu\text{-(CH}_3)_2\text{Si(indenyl)}_2\text{Hf(CH}_2\text{CH}_3)_2$, and
 $\mu\text{-(C}_6\text{H}_5)_2\text{C(indenyl)}_2\text{Hf(CH}_3)_2$,
- 15 75. The process of any of claims 69-74 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprise at least one fused polycyclic aromatic ring.
- 20 76. The process of any of claims 69-75 wherein the aryl groups of said halogenated tetraaryl Group 13 anion comprises at least one aromatic ring pendant in the 4 position to a phenyl ligand.
77. The process of any of claims 69-76 wherein said halogenated tetraaryl Group 13 anion is [tetrakis(perfluoro-4-biphenyl)borate].
- 25 78. The process of any of claims 67-77 wherein said cocatalyst comprises an essentially cationic complex selected from anilinium, ammonium, carbenium or silylium cationic complexes.
- 30 79. The process of any of claims 67-78 wherein said propylene copolymer contains units derived from propylene in an amount of from 80 to 90 weight percent.

80. The process of any of claims 67-79 wherein said propylene copolymer contains units derived from ethylene in an amount of from 10 to 25 weight percent.
- 5 81. The process of any of claims 67-80 wherein said homogeneous polymerization conditions are adiabatically conducted in a continuous polymerization process.
- 10 82. The process of any of claims 67-81 wherein said homogeneous polymerization conditions are conducted in a continuous process at a pressure of at least 500 bar.
83. The process of any of claims 67-82 wherein the reaction temperature is in a range of 60 °C to 200 °C.
- 15 84. The process of any of claims 67-83 wherein said propylene copolymer has a melting point of from less than 90°C to greater than 40°C.
- 20 85. The process of any of claims 67-84 wherein said propylene copolymer has a heat of fusion of greater than 1.0 J/g to less than 75J/g.
86. The process of any of claims 67-85 wherein said propylene copolymer has a heat of fusion of greater than 4.0 J/g to less than 30J/g.
- 25 87. The process of any of claims 67-86 wherein said propylene copolymer has a a traid tacticity of greater than 90%.
88. A polymeric product prepared by olefin polymerization said product comprising:
- 30 a) a copolymer comprising 5 to 25 % by weight of ethylene-derived units and 95 to 75% by weight of propylene-derived units, the copolymer having:

- (i) a melting point of less than 90 °C;
- (ii) a relationship of elasticity to 500% tensile modulus such that
- $$\text{Elasticity} \leq 0.935M + 12,$$
- where elasticity is in percent and M is the 500% tensile modulus in MPa; and

- (iii) a relationship of flexural modulus to 500% tensile modulus such that

$$\text{Flexural Modulus} \leq 4.2e^{0.27M} + 50,$$

where flexural modulus is in MPa and M is the 500% tensile modulus in MPa; and

- b) anions containing a single coordination complex of a charge-bearing boron or aluminum core wherein said core is tetra-aryl-substituted and each aryl substituent contains at least two cyclic aromatic rings.

89. A polymeric product prepared by olefin polymerization said product comprising:

- a) a copolymer comprising 5 to 25 % by weight of ethylene-derived units and 95 to 75% by weight of propylene-derived units, the copolymer having:

- (i) a melting point of less than 90 °C;
- (ii) a relationship of elasticity to 500% tensile modulus such that

$$\text{Elasticity} \leq 0.935M + 12,$$

where elasticity is in percent and M is the 500% tensile modulus in MPa; and

- (iii) a relationship of flexural modulus to 500% tensile modulus such that

$$\text{Flexural Modulus} \leq 4.2e^{0.27M} + 50,$$

where flexural modulus is in MPa and M is the 500% tensile modulus in MPa; and

- b) anions containing a single coordination complex of a charge-bearing boron or aluminum core wherein said core has three halogenated

aryl-ligands, wherein each aryl substituent contains at least two cyclic aromatic rings, and one acetyl-aryl moiety ligand.

1/3
Fig. 1


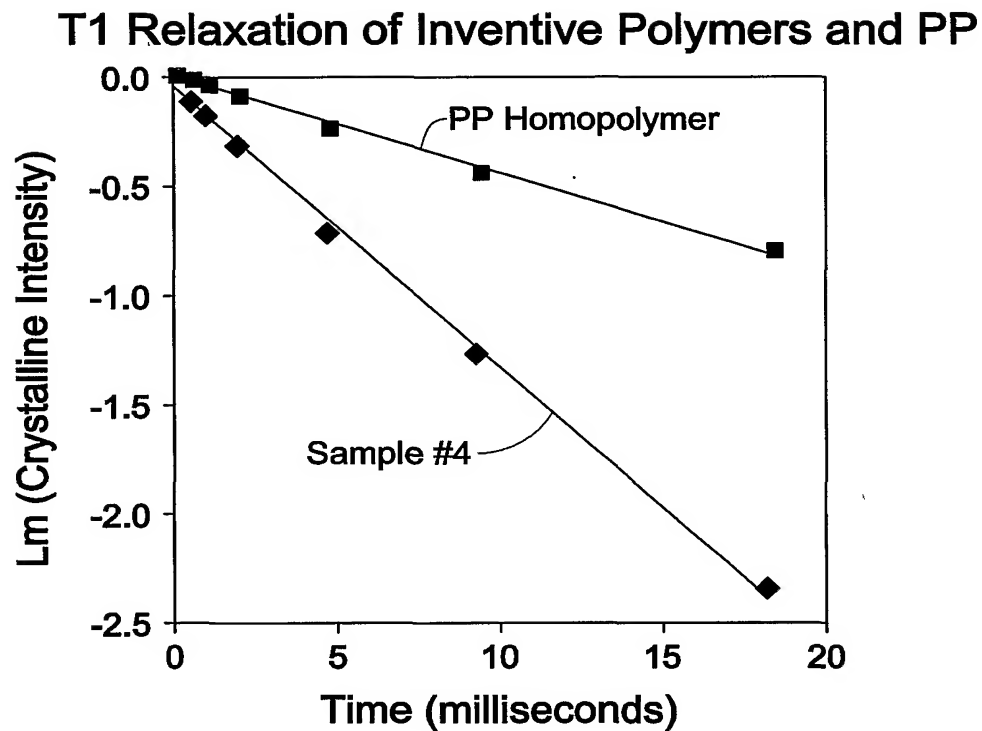


Fig. 2





2/3
Fig. 3

Fig. 4

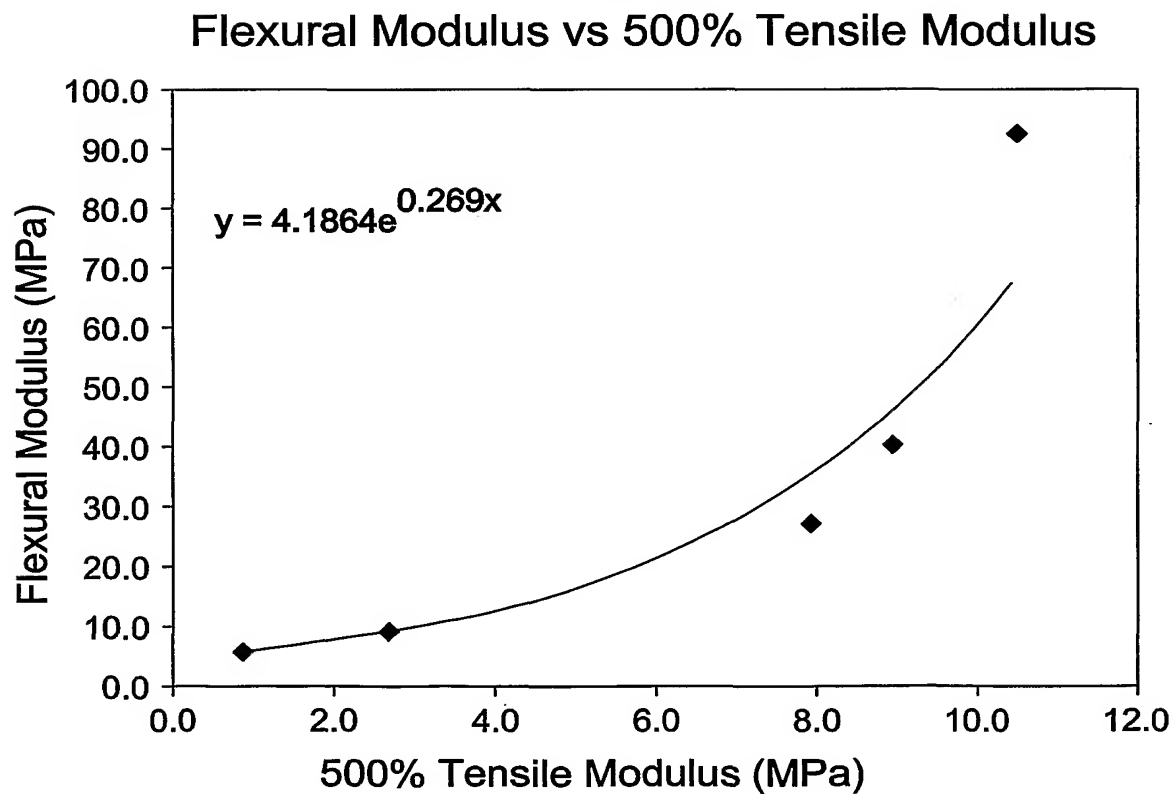

3/3

Fig. 5

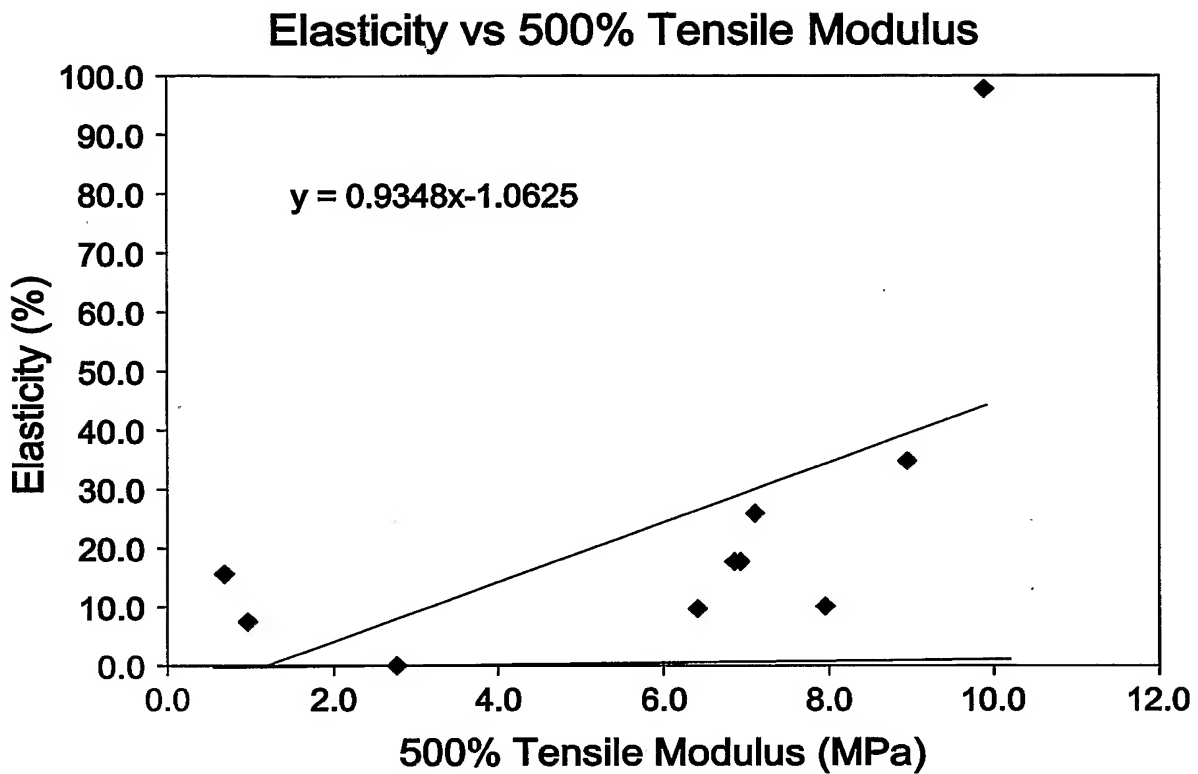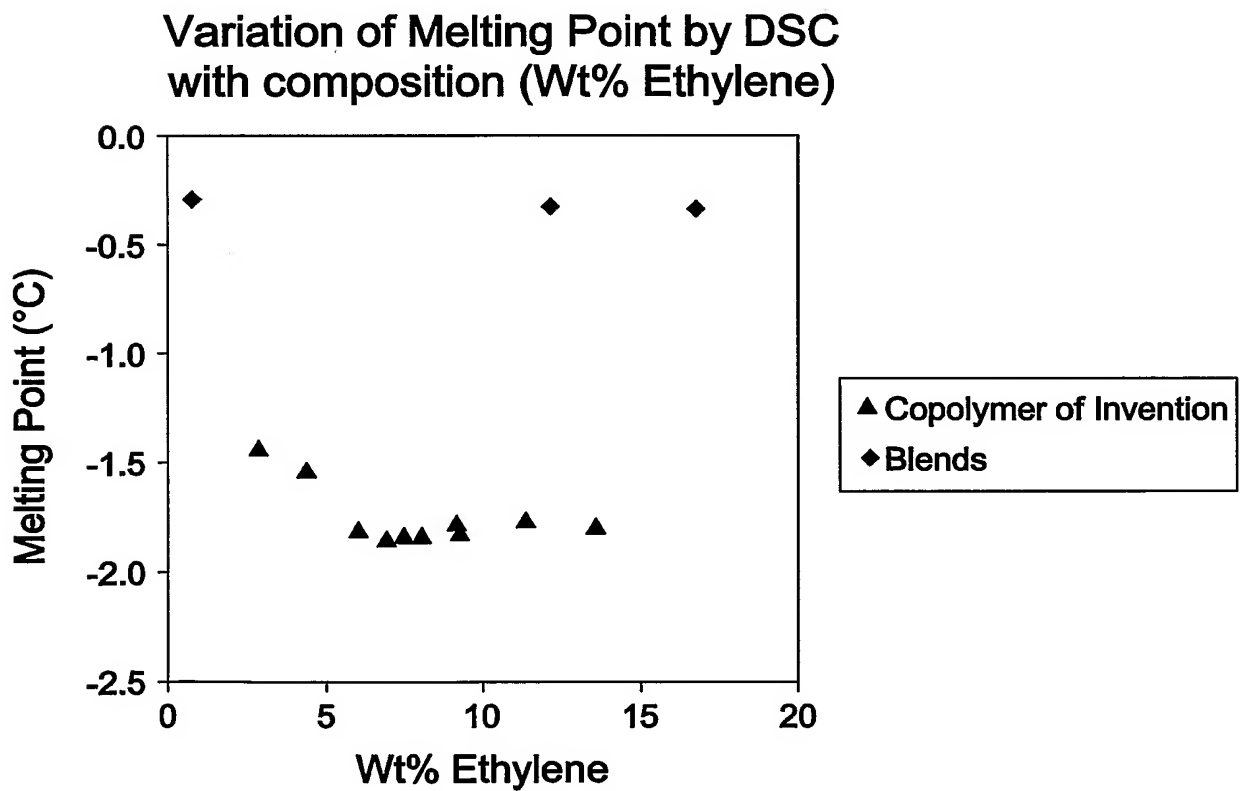Heat of Fusion: Comparison of
Copolymers produced with Different NCA's


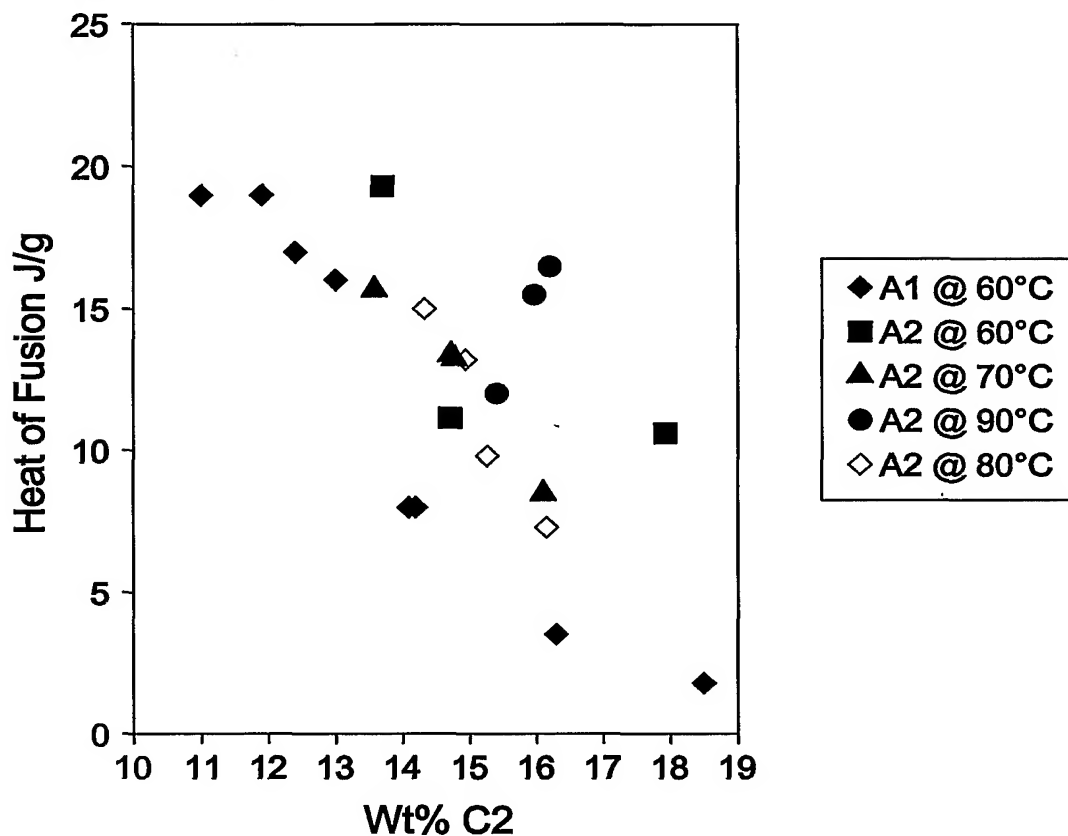


Fig. 6

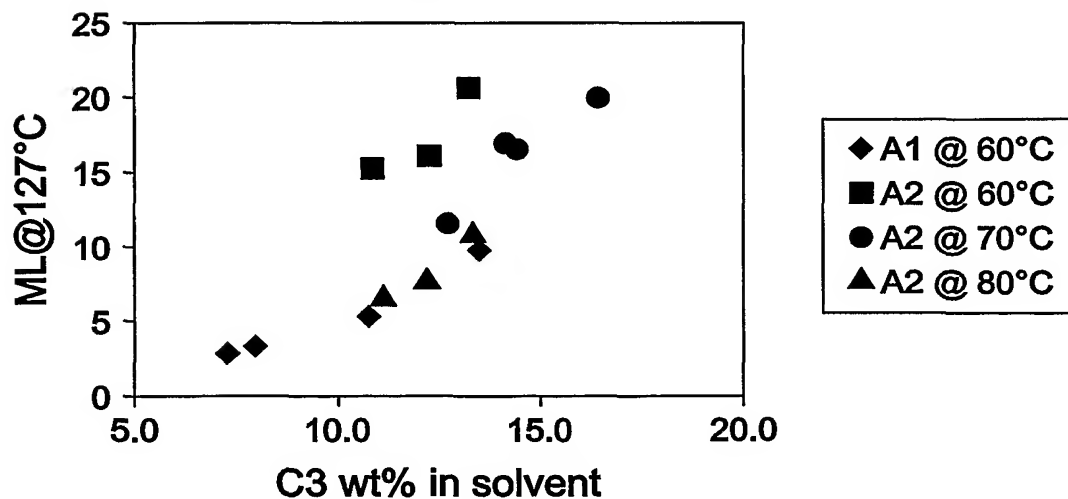

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/10515

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08F210/16 C08F210/06 C08F2/06 C08F4/643

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 01745 A (EXXON CHEMICAL PATENTS INC) 13 January 2000 (2000-01-13) page 8, line 15; claims; examples ---	1-89
X	WO 99 07788 A (EXXON CHEMICAL PATENTS INC) 18 February 1999 (1999-02-18) page 5, line 21 - line 24 page 7, line 14 -page 8, line 8 page 12, line 6 -page 16, line 14 examples; tables ---	1-89
X	WO 00 01766 A (EXXON CHEMICAL PATENTS INC) 13 January 2000 (2000-01-13) the whole document --- -/--	1-89



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

19 September 2002

Date of mailing of the international search report

27/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kaumann, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/10515

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 24792 A (EXXON CHEMICAL PATENTS INC) 4 May 2000 (2000-05-04) page 4, line 14 -page 10, line 5 page 13, line 29 -page 14, line 25 claims; examples ----	1-64, 67-87
A	WO 98 59002 A (BOREALIS AS ;MALM BO (FI); KAUNO ALASTALO (FI); PITKANEN PAIVI (FI) 30 December 1998 (1998-12-30) claims; examples ----	65,66, 88,89
A	US 5 637 665 A (SUSTIC ANDRES ET AL) 10 June 1997 (1997-06-10) claims; examples; tables ----	65,66, 88,89
A	WO 99 20663 A (EXXON CHEMICAL PATENTS INC) 29 April 1999 (1999-04-29) claims; examples; tables -----	65,66, 88,89

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/10515

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0001745	A	13-01-2000	AU 4965299 A	24-01-2000
			EP 1091984 A1	18-04-2001
			JP 2002519486 T	02-07-2002
			WO 0001745 A1	13-01-2000
			US 2002004575 A1	10-01-2002
WO 9907788	A	18-02-1999	AU 731255 B2	29-03-2001
			AU 8566698 A	01-03-1999
			BR 9811892 A	28-11-2000
			CN 1265693 T	06-09-2000
			EP 1223191 A1	17-07-2002
			EP 1003814 A1	31-05-2000
			JP 2001512771 T	28-08-2001
			WO 9907788 A1	18-02-1999
			US 2002004575 A1	10-01-2002
WO 0001766	A	13-01-2000	AU 4962399 A	24-01-2000
			EP 1098934 A1	16-05-2001
			JP 2002519497 T	02-07-2002
			WO 0001766 A1	13-01-2000
			US 2002004575 A1	10-01-2002
WO 0024792	A	04-05-2000	AU 1321200 A	15-05-2000
			AU 1448400 A	15-05-2000
			BR 9914717 A	10-07-2001
			BR 9914738 A	03-07-2001
			CN 1328580 T	26-12-2001
			CN 1324370 T	28-11-2001
			EP 1129115 A1	05-09-2001
			EP 1196464 A1	17-04-2002
			US 2002086958 A1	04-07-2002
			WO 0024792 A1	04-05-2000
			WO 0024793 A1	04-05-2000
			US 6300433 B1	09-10-2001
WO 9859002	A	30-12-1998	FI 972714 A	25-12-1998
			FI 972726 A	25-12-1998
			FI 972727 A	25-12-1998
			FI 972729 A	25-12-1998
			AU 726669 B2	16-11-2000
			AU 7921398 A	04-01-1999
			AU 8121198 A	04-01-1999
			BR 9810290 A	19-09-2000
			BR 9810625 A	25-07-2000
			CN 1261390 T	26-07-2000
			CN 1267310 T	20-09-2000
			EP 0991679 A1	12-04-2000
			EP 0991719 A1	12-04-2000
			WO 9858971 A1	30-12-1998
			WO 9859002 A1	30-12-1998
			JP 2002504956 T	12-02-2002
			JP 2002508013 T	12-03-2002
			US 2002082376 A1	27-06-2002
			US 6365682 B1	02-04-2002
			US 6342564 B1	29-01-2002
			ZA 9805489 A	20-01-1999
			AU 726554 B2	09-11-2000
			AU 7921098 A	04-01-1999

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/10515

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9859002	A		BR 9810934 A	20-11-2001
			CN 1268959 T	04-10-2000
			EP 0887379 A1	30-12-1998
			WO 9858975 A1	30-12-1998
			JP 2002504953 T	12-02-2002
			NZ 502014 A	26-04-2002
			PL 337714 A1	28-08-2000
			TW 418214 B	11-01-2001
			ZA 9805490 A	20-01-1999
			AU 7921198 A	04-01-1999
			CN 1267311 T	20-09-2000
			EP 0887380 A1	30-12-1998
			WO 9858976 A1	30-12-1998
			JP 2002504954 T	12-02-2002
			AU 7921298 A	04-01-1999
			CN 1268146 T	27-09-2000
			EP 0991684 A1	12-04-2000
			WO 9858977 A1	30-12-1998
			JP 2002504955 T	12-02-2002
US 5637665	A	10-06-1997	US 5302675 A	12-04-1994
			US 5681913 A	28-10-1997
			US 5714554 A	03-02-1998
			AT 201702 T	15-06-2001
			AU 664318 B2	09-11-1995
			AU 5125193 A	29-03-1994
			CA 2142448 A1	17-03-1994
			DE 69330279 D1	05-07-2001
			DE 69330279 T2	31-10-2001
			EP 0660847 A1	05-07-1995
			ES 2157930 T3	01-09-2001
			FI 951042 A	07-03-1995
			JP 8501337 T	13-02-1996
			NO 950826 A	02-03-1995
			WO 9405711 A1	17-03-1994
WO 9920663	A	29-04-1999	WO 9920663 A2	29-04-1999

PUB-NO: WO002083754A1
DOCUMENT-IDENTIFIER: WO 2083754 A1
TITLE: PROPYLENE ETHYLENE
POLYMERS AND
PRODUCTION PROCESS
PUBN-DATE: October 24, 2002

INVENTOR-INFORMATION:

NAME	COUNTRY
DATTA, SUDHIN	US
HU, WEIGUO	US
RAVISHANKAR, P S	US
HARRINGTON, BRUCE A	US
RODRIGUEZ, GEORGE	US

ASSIGNEE-INFORMATION:

NAME	COUNTRY
EXXONMOBIL CHEM PATENTS INC	US
DATTA SUDHIN	US
HU WEIGUO	US
RAVISHANKAR P S	US
HARRINGTON BRUCE A	US
RODRIGUEZ GEORGE	US

APPL-NO: US00210515

APPL-DATE: April 2, 2002

PRIORITY-DATA: US83425601A (April 12, 2001) ,
US34218601P (December 19, 2001) ,
US33665501P (December 5, 2001)

INT-CL (IPC): C08F210/16 , C08F210/06 , C08F002/06 ,
C08F004/643

EUR-CL (EPC): C08F210/06 , C08F210/06 , C08F210/16 ,
C08F210/16

ABSTRACT:

CHG DATE=20021203 STATUS=O>Ethylene propylene copolymers, substantially free of diene, are described. The copolymers will have a uniform distribution of both tacticity and comonomer between copolymer chains. Further, the copolymers will exhibit a statistically insignificant intramolecular difference of tacticity. The copolymers are made in the presence of a metallocene catalyst.